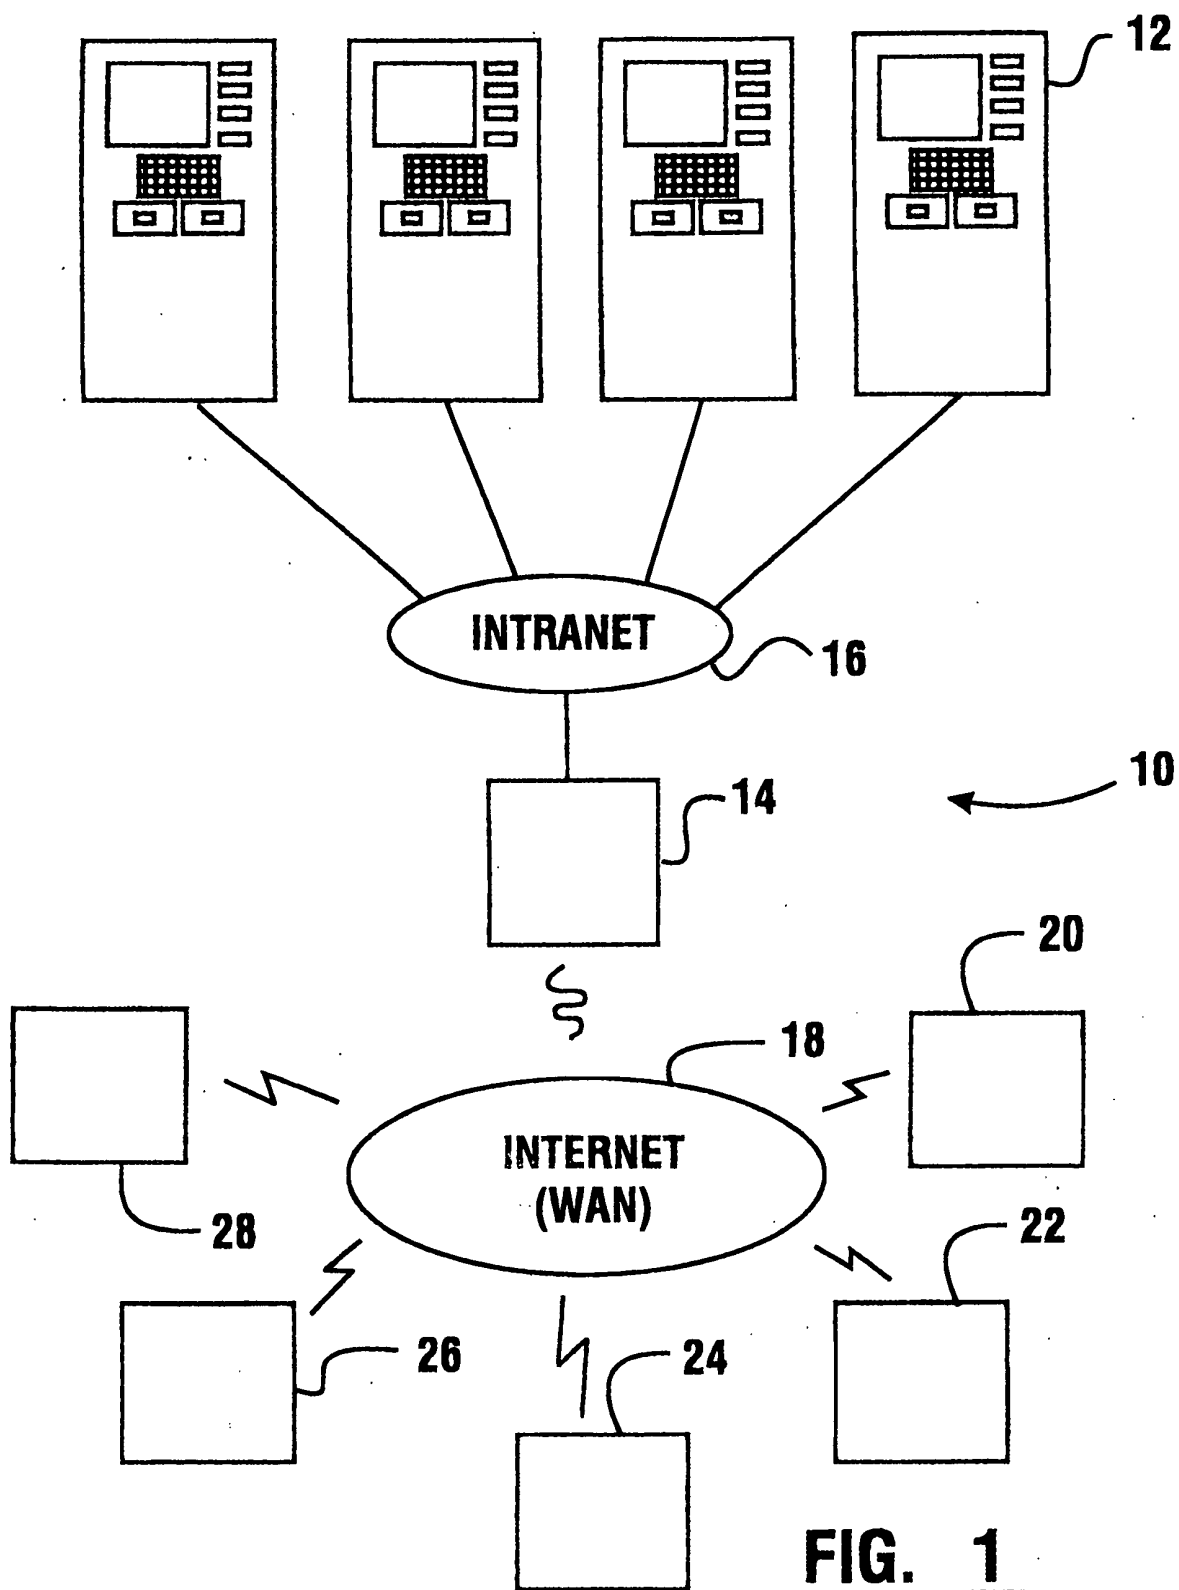
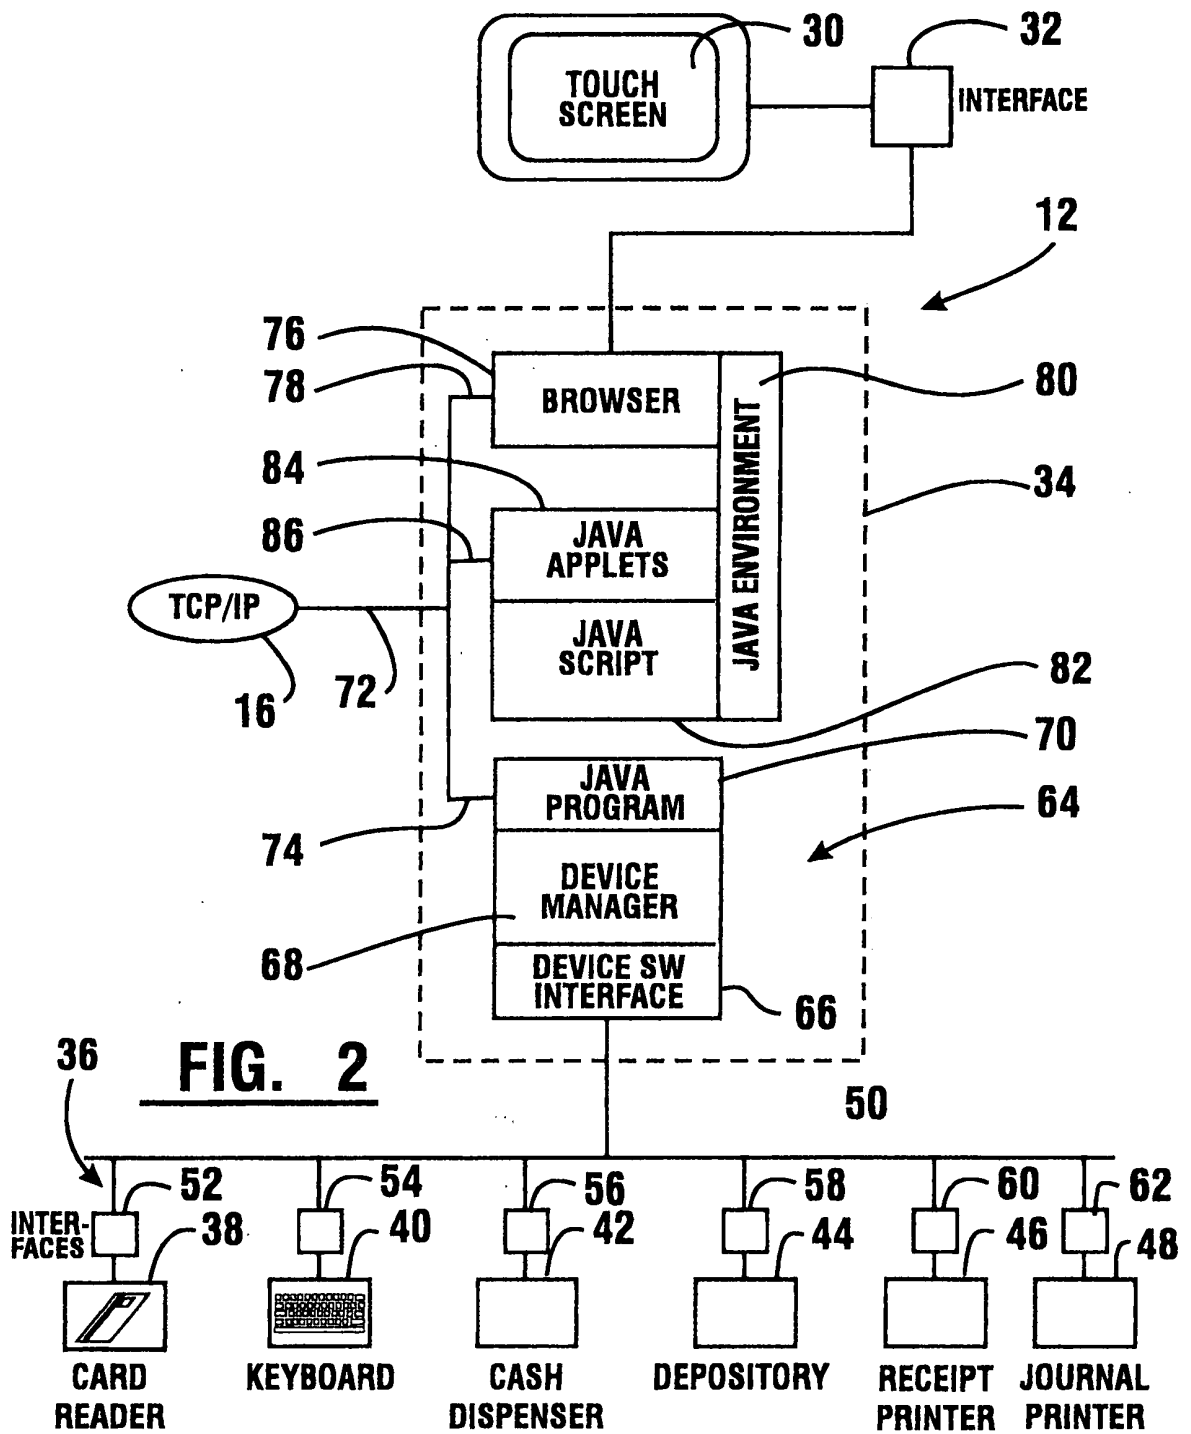


004180" 0166E960





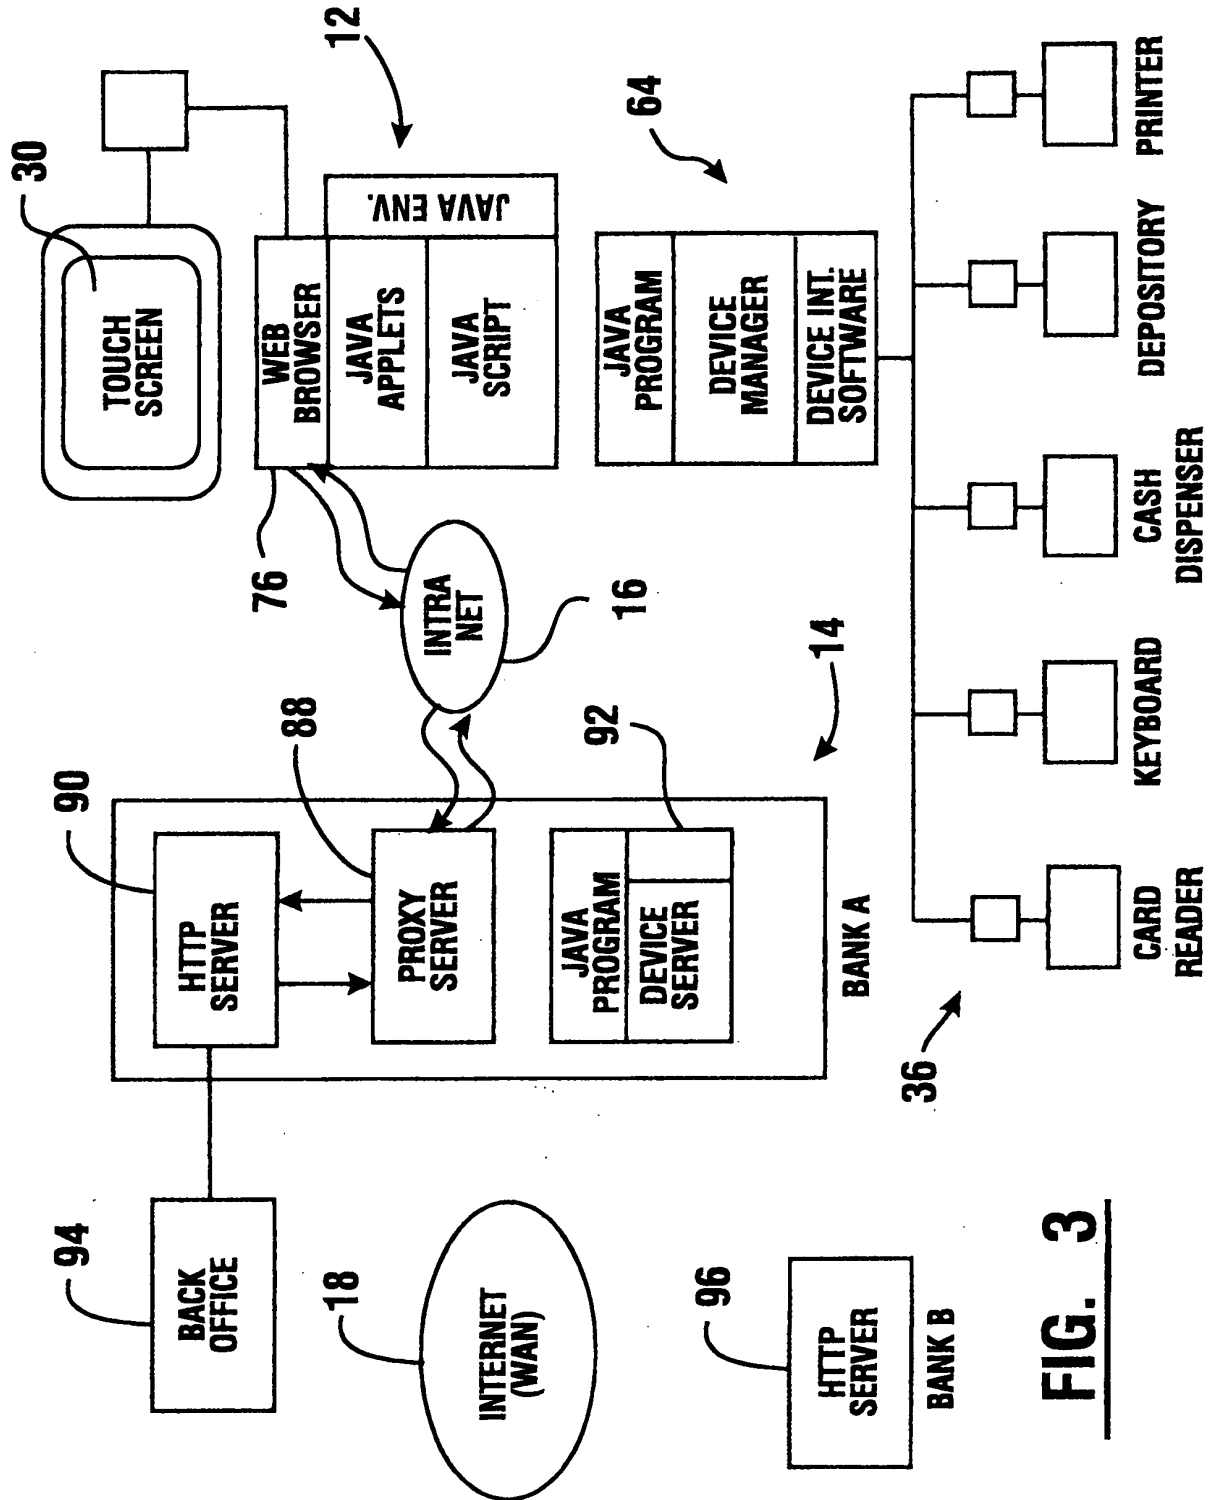


FIG. 3

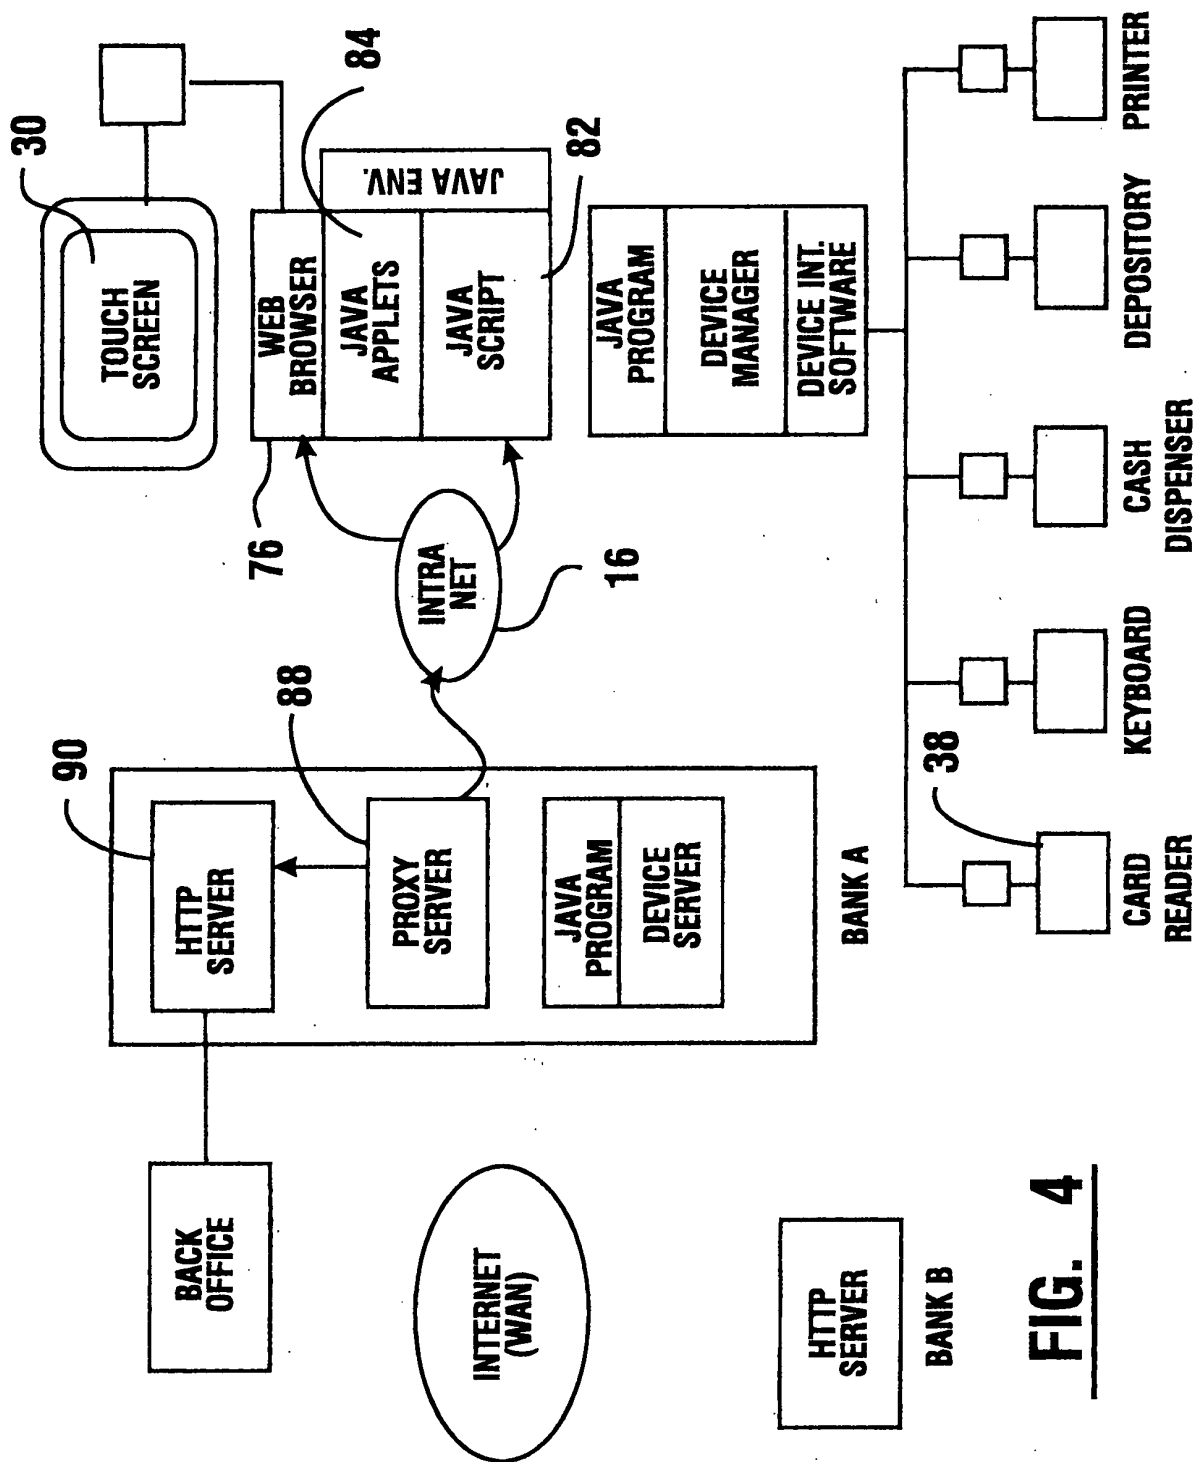


FIG. 4

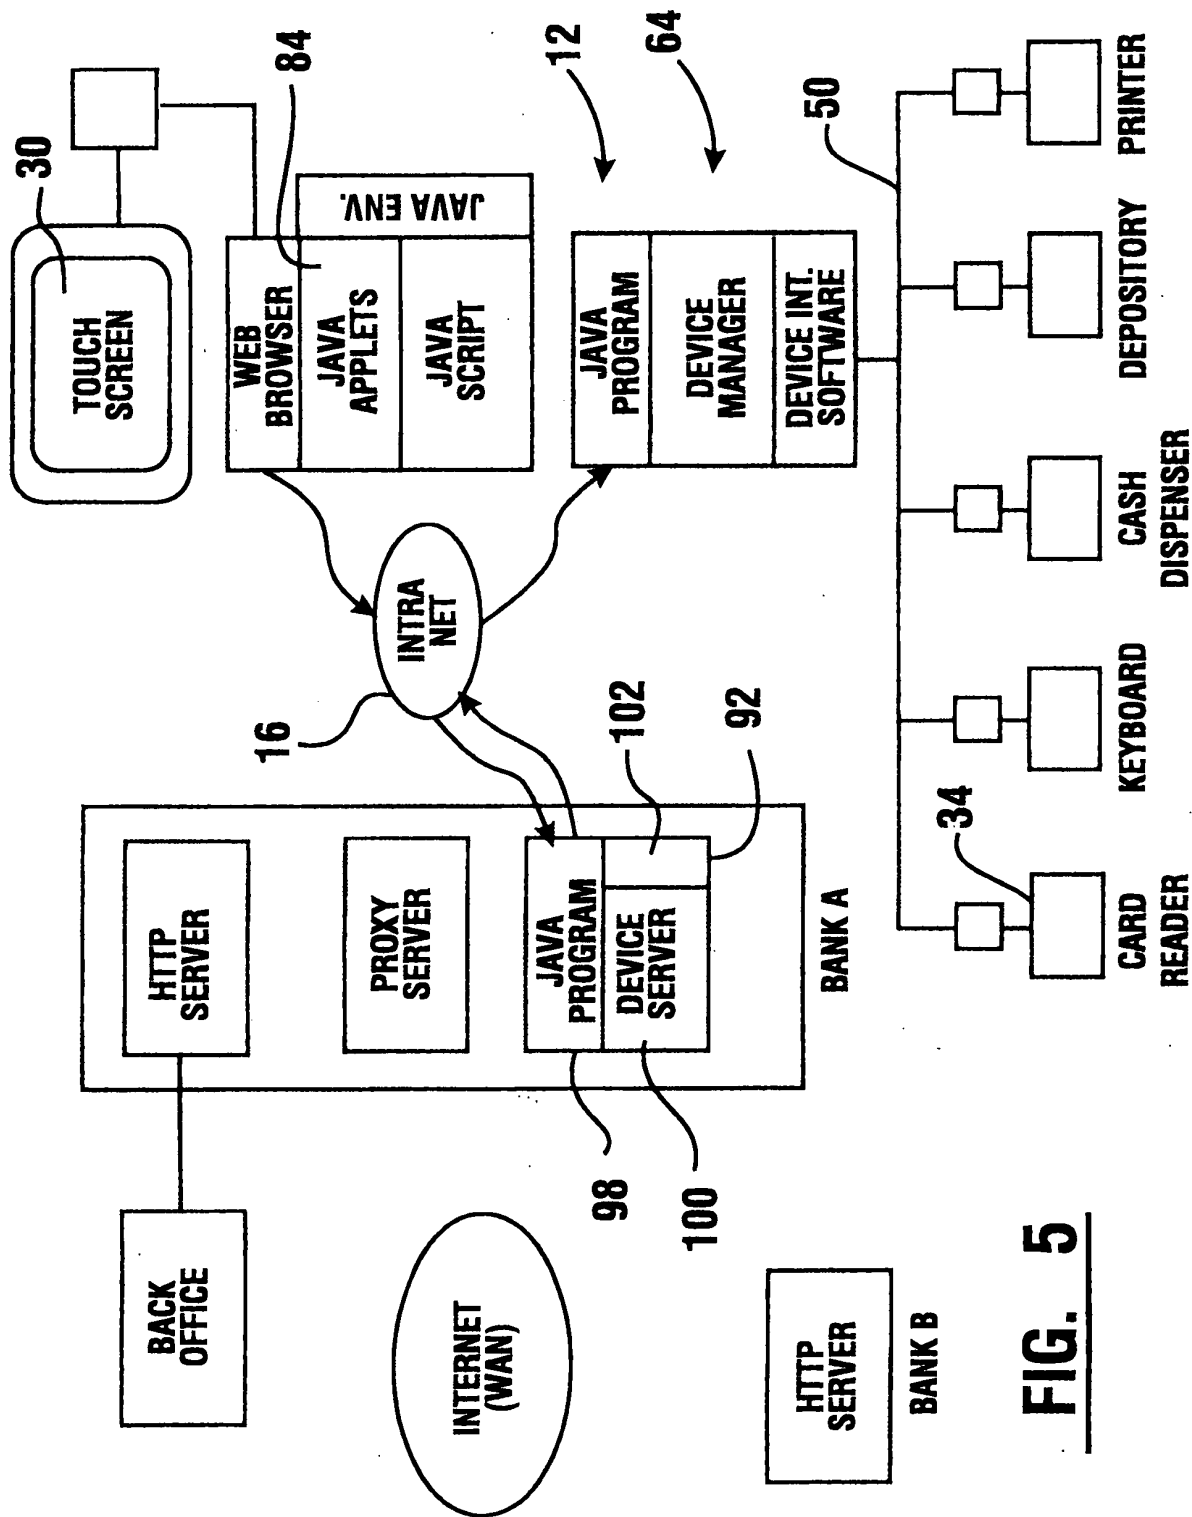


FIG. 5

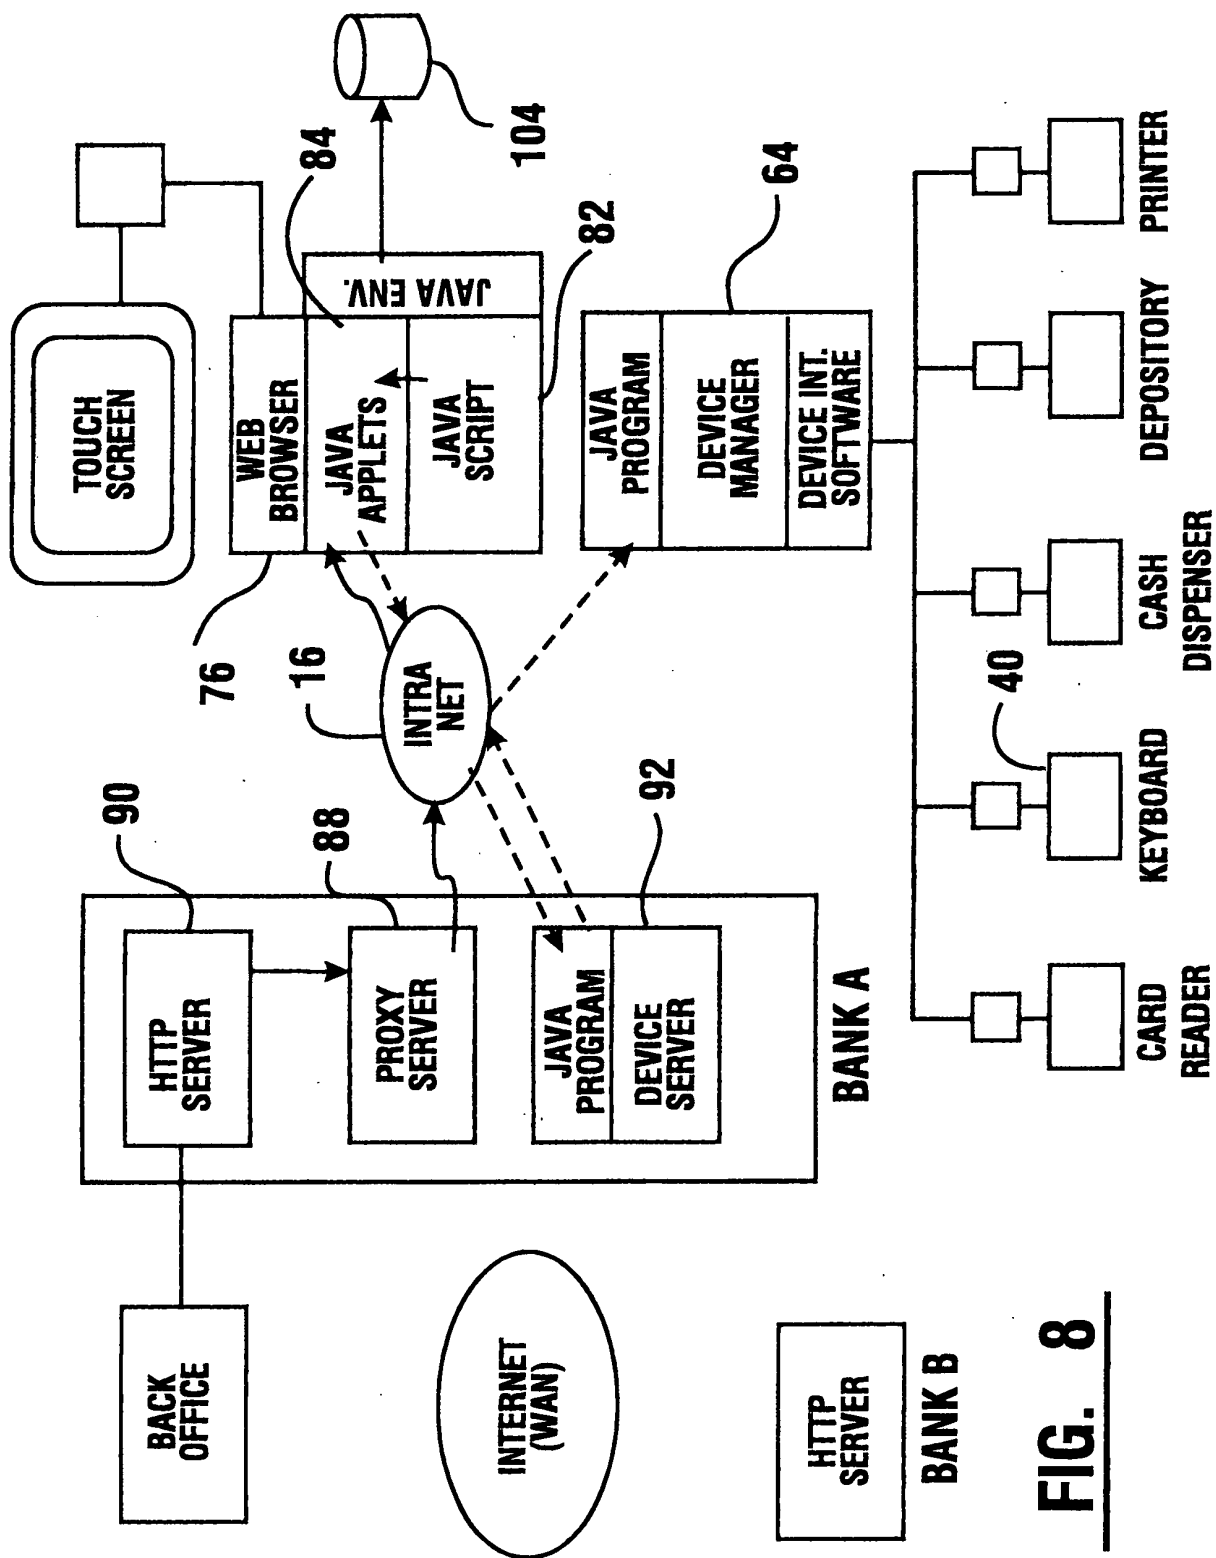


FIG. 8

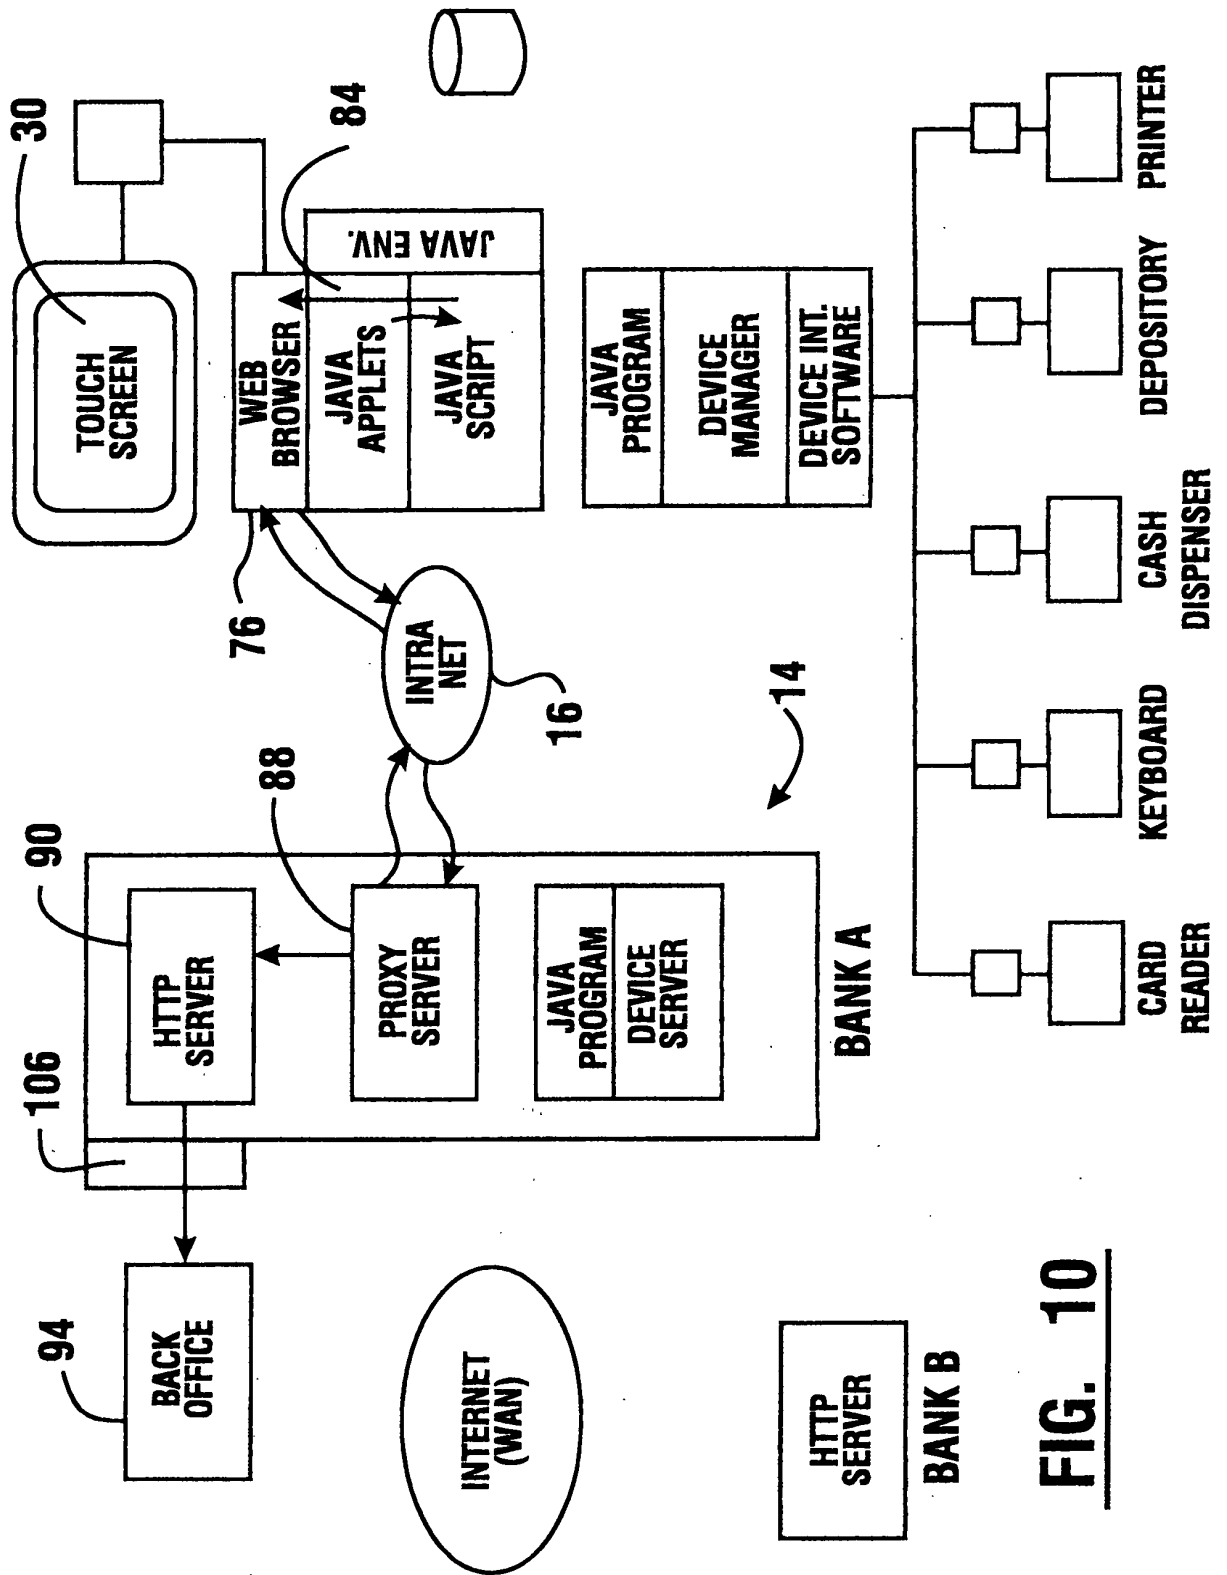


FIG. 10

004780" OF 66950

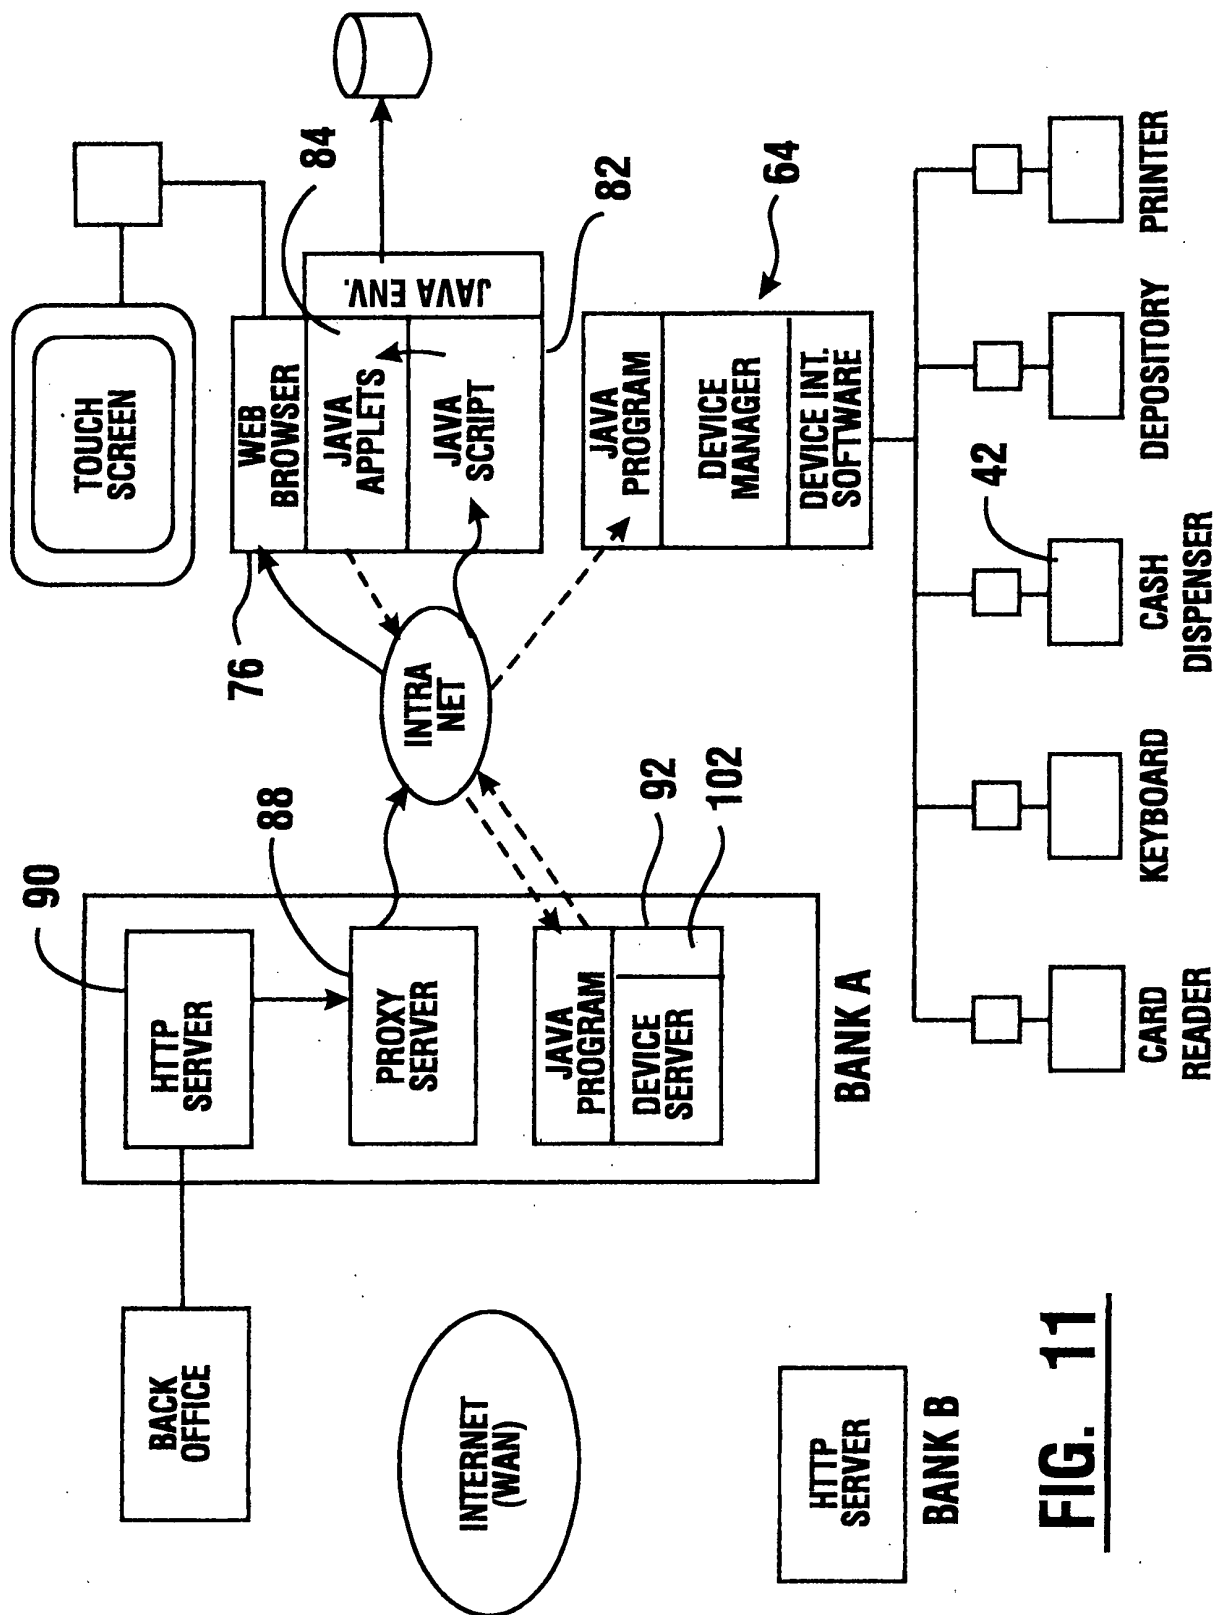


FIG. 11

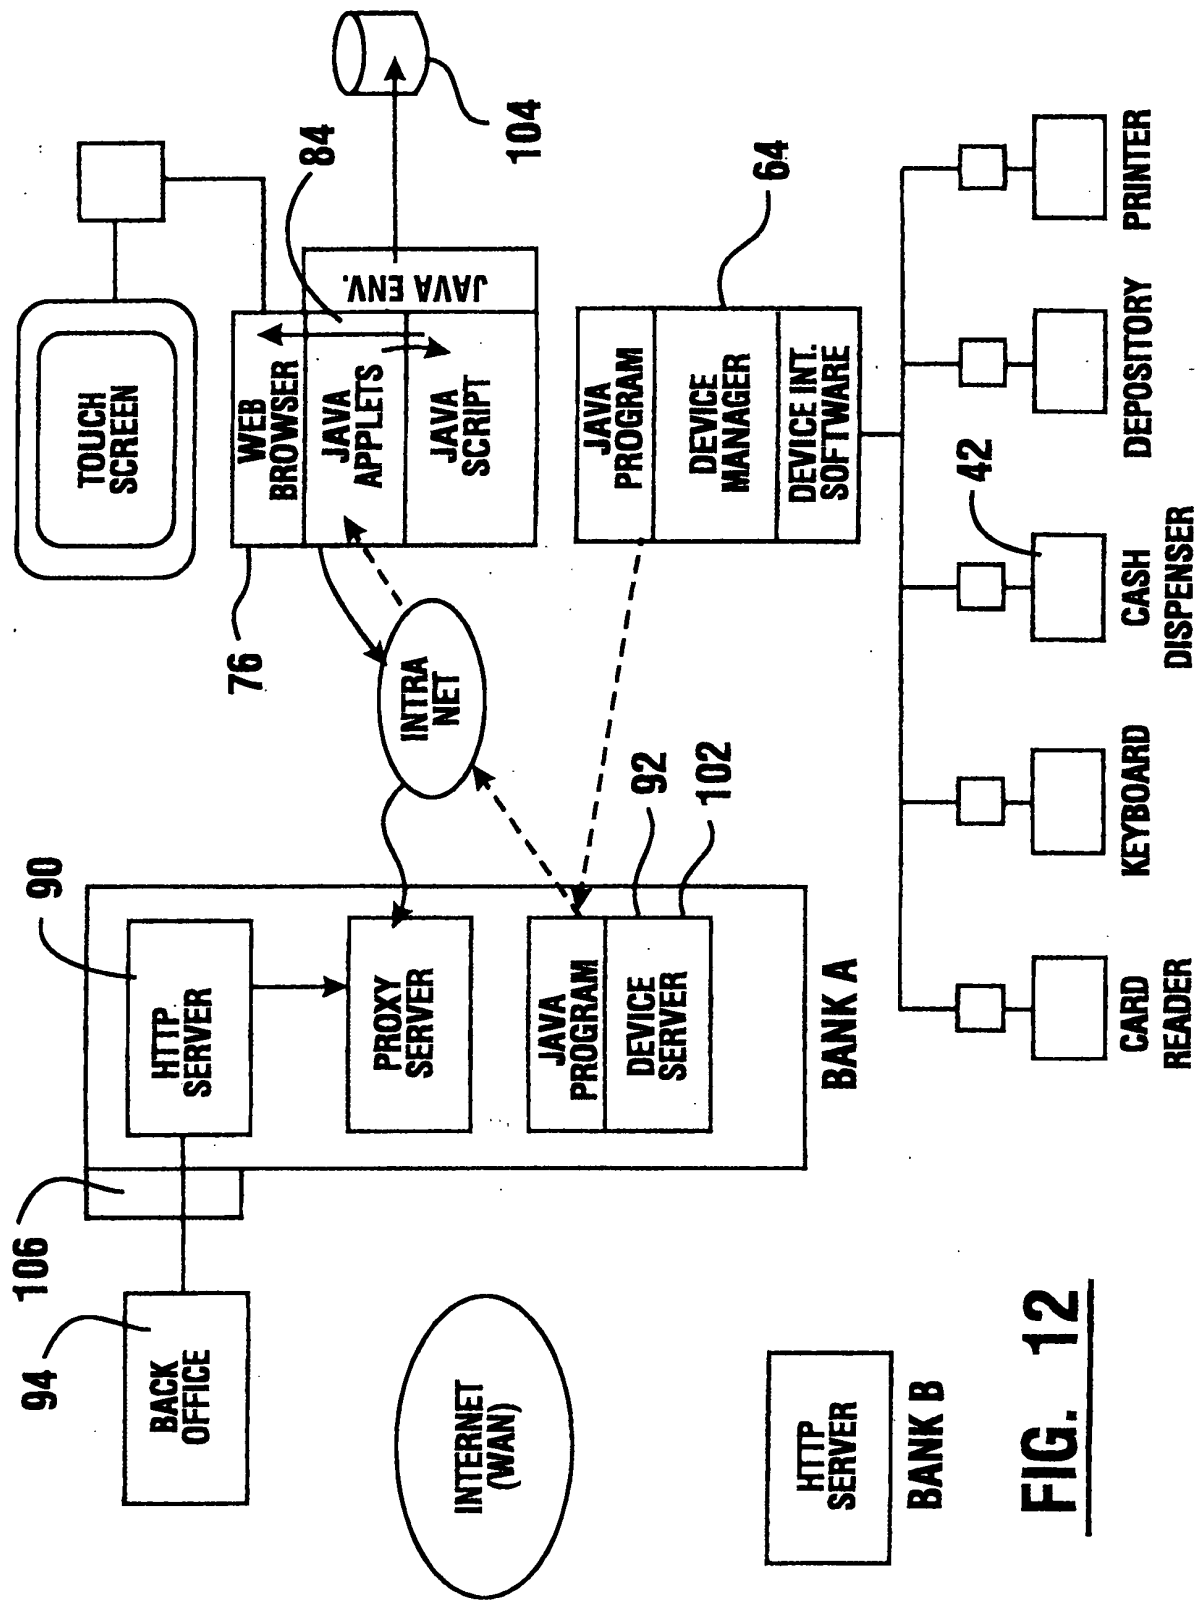


FIG. 12

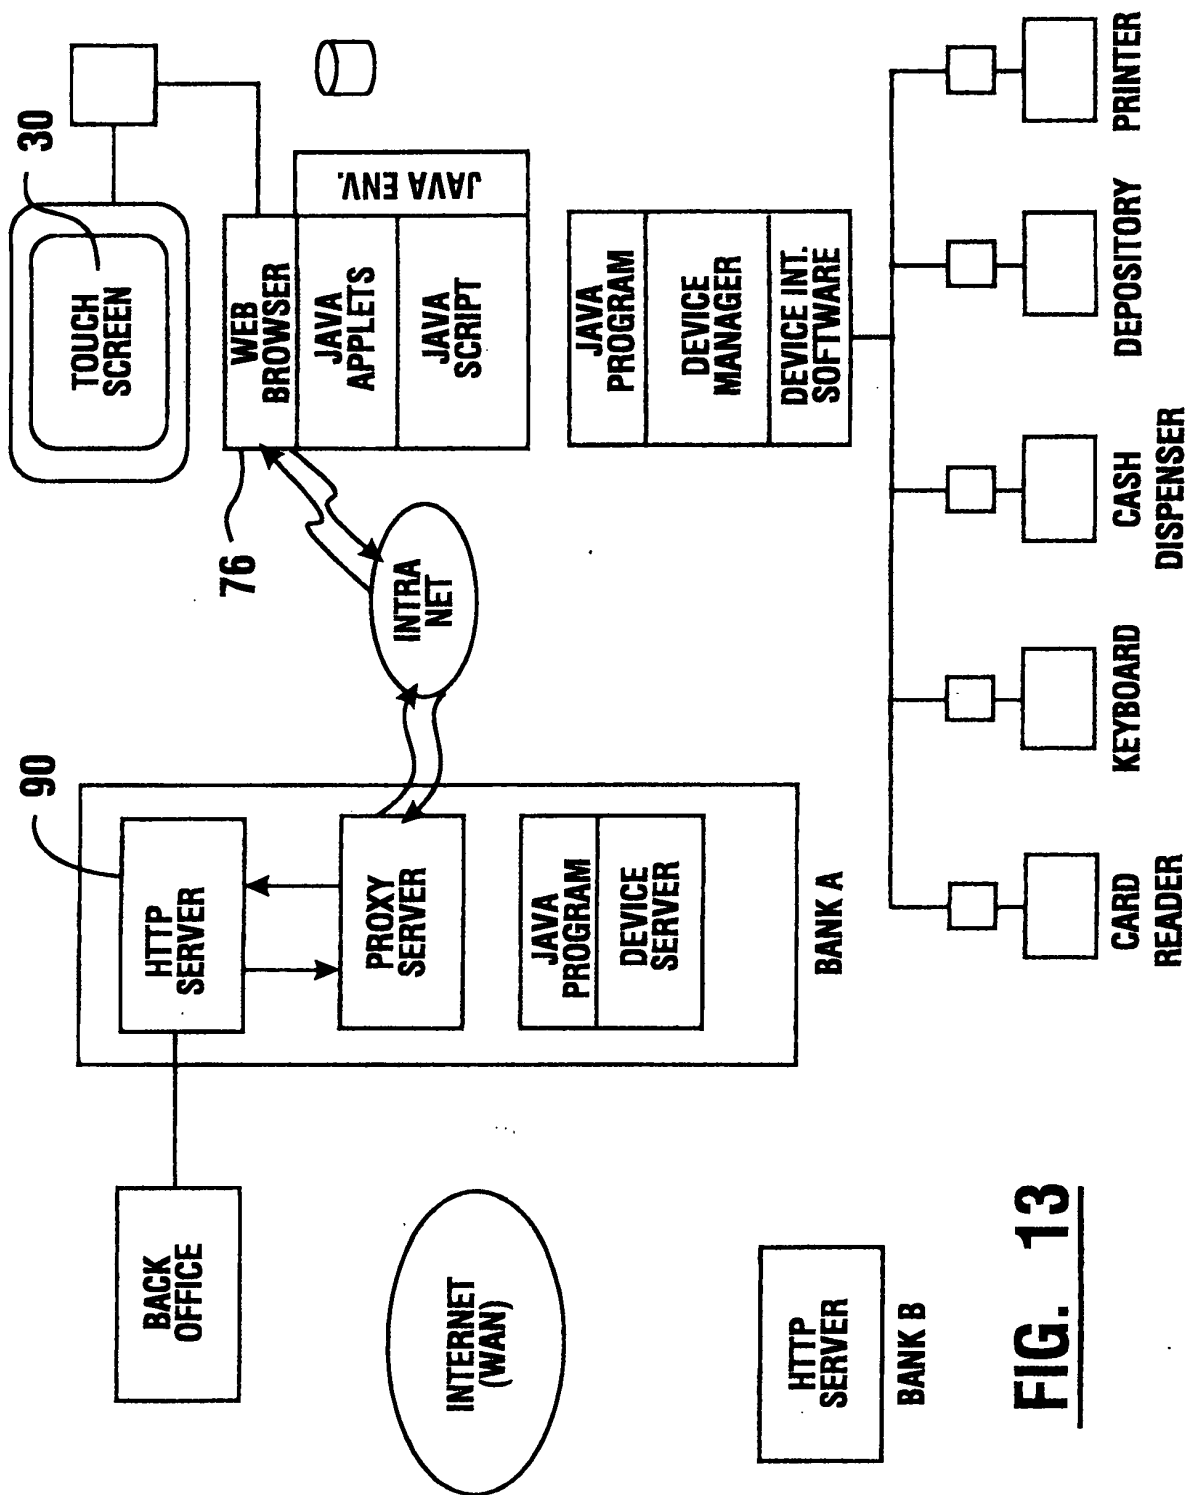


FIG. 13

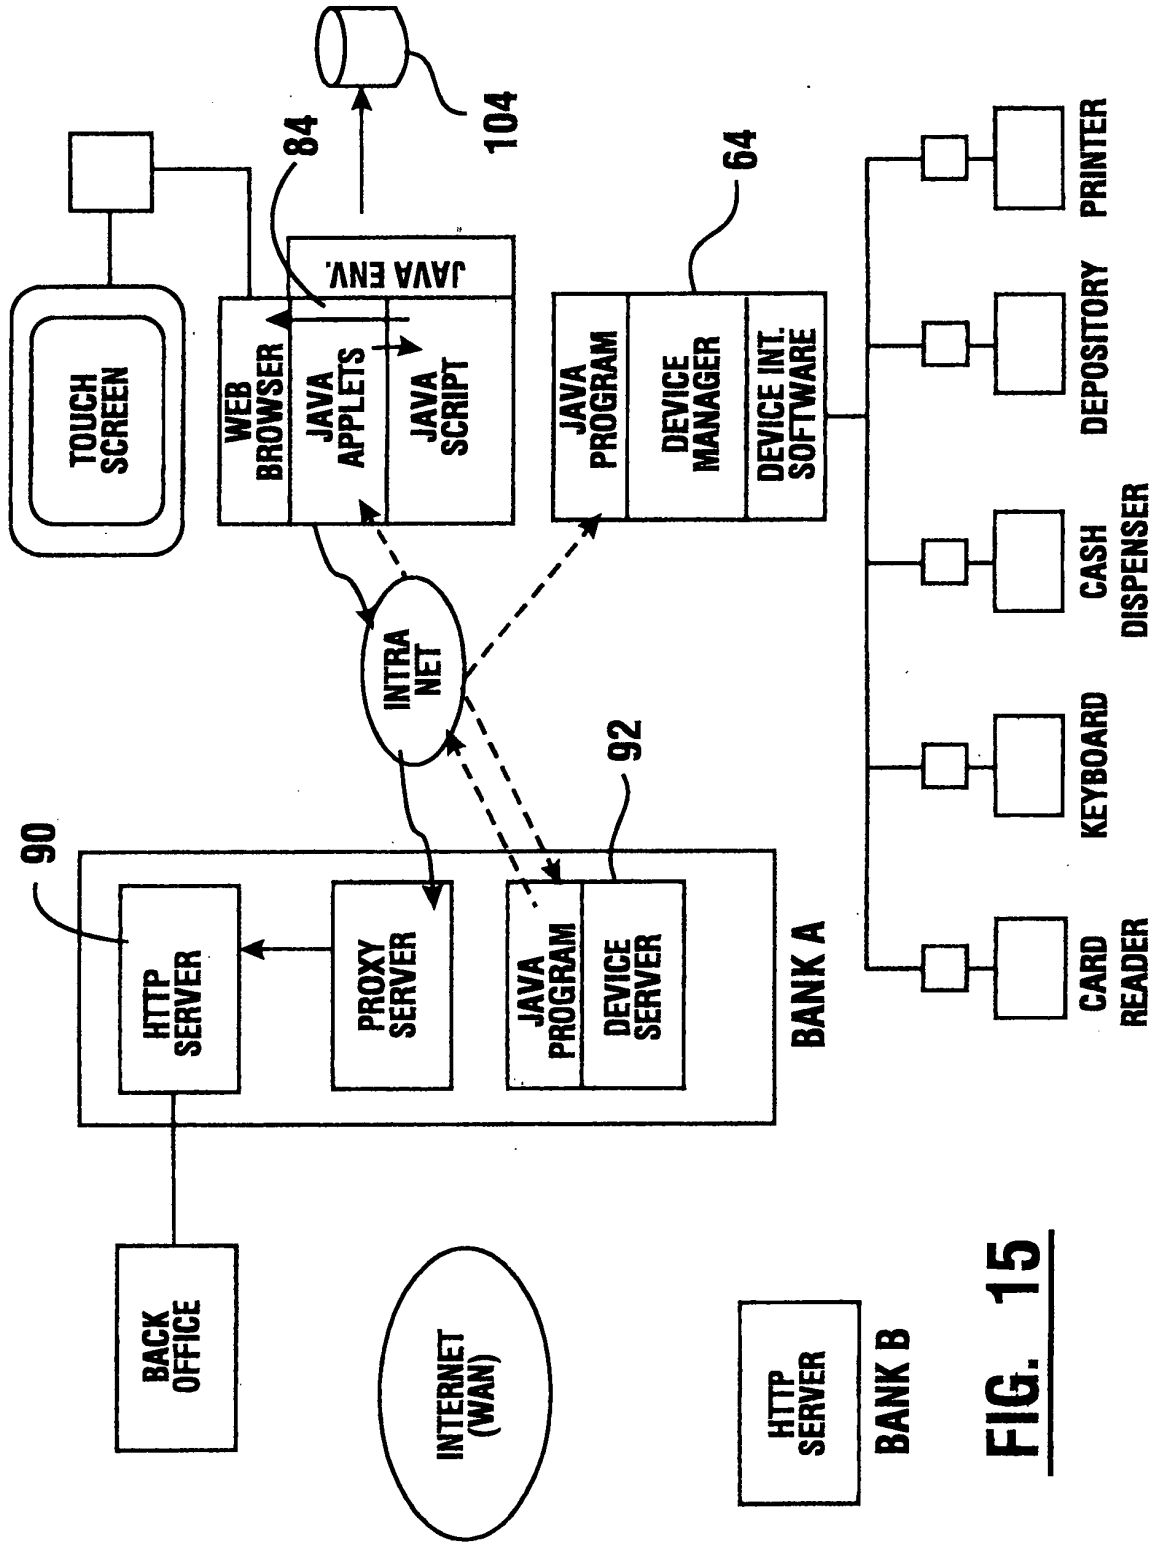


FIG. 15

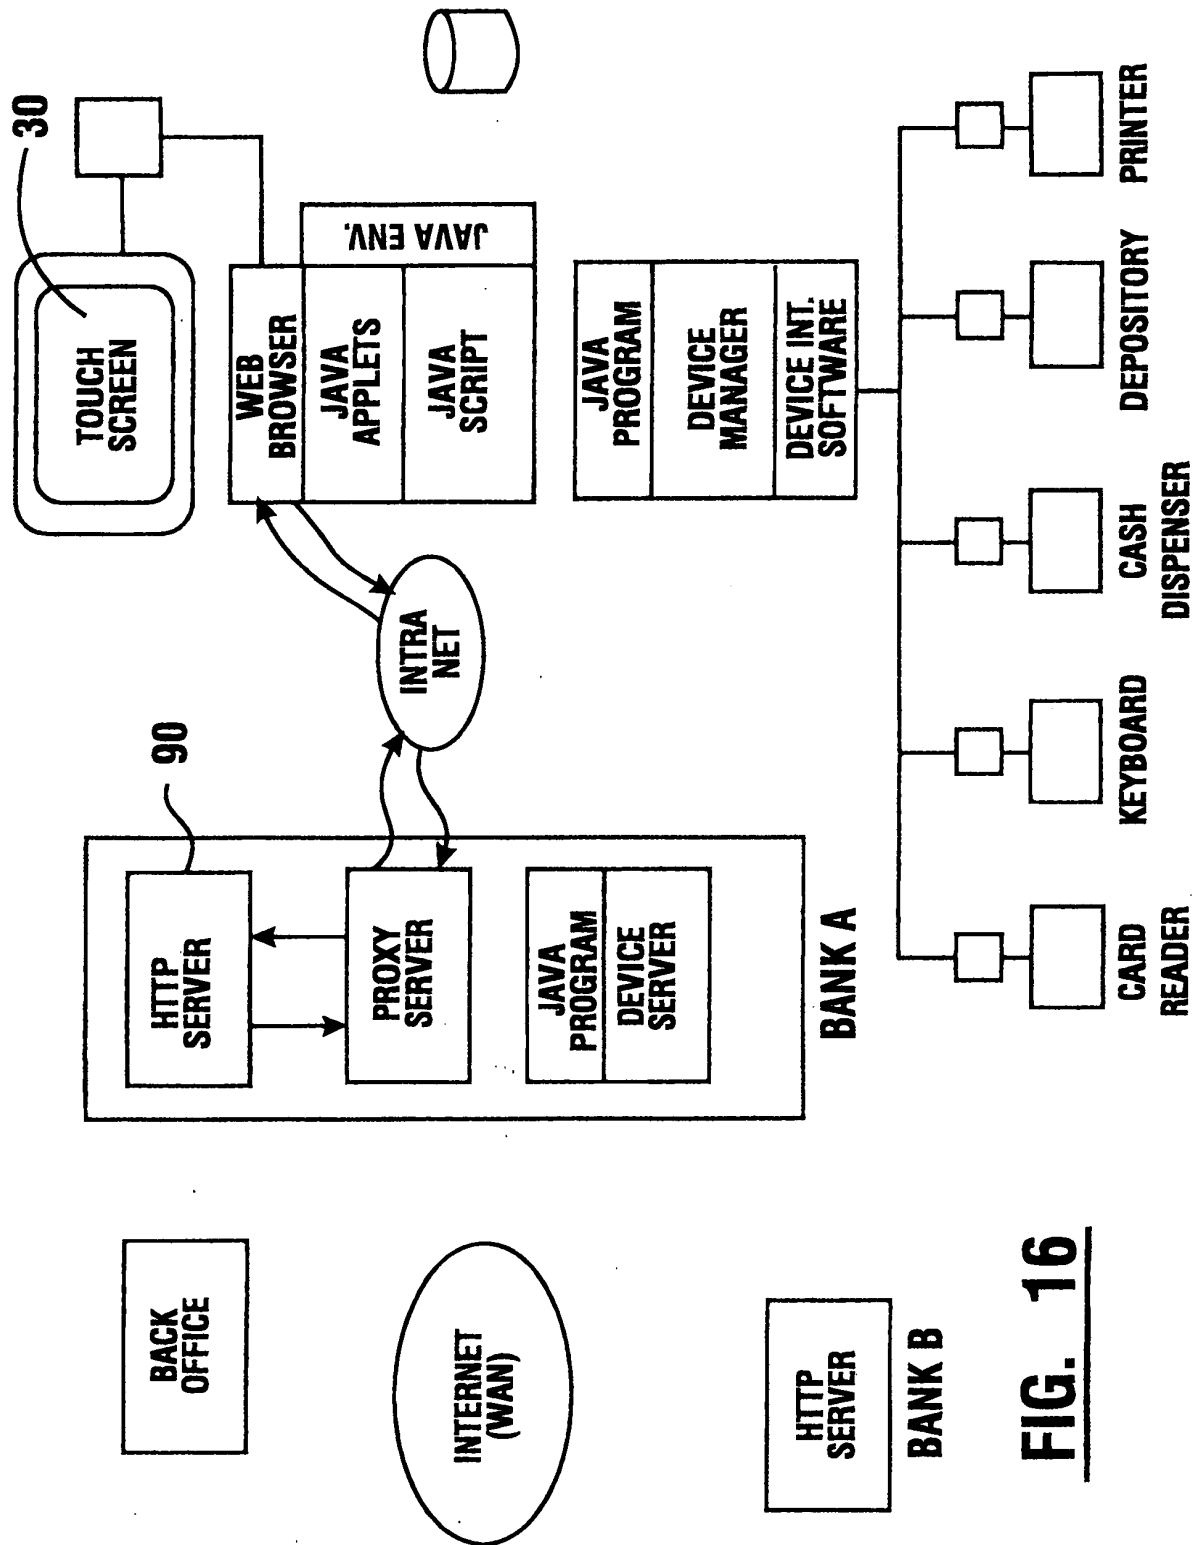


FIG. 16

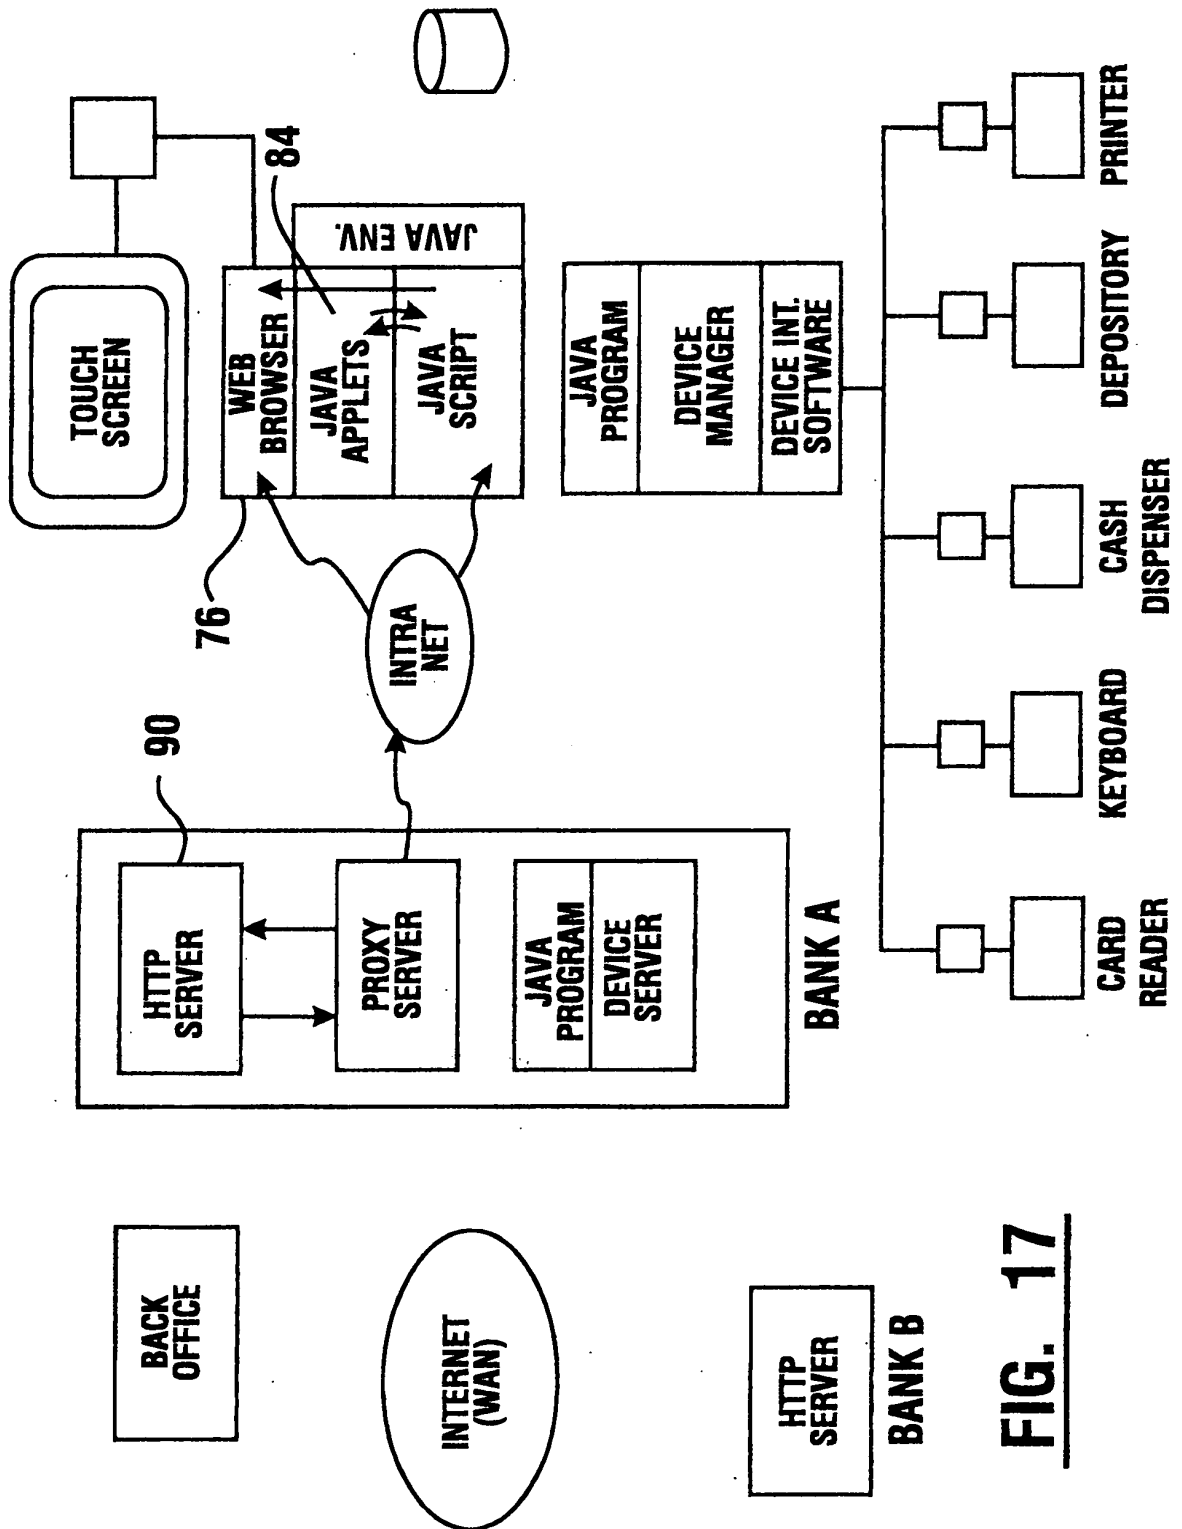


FIG. 17

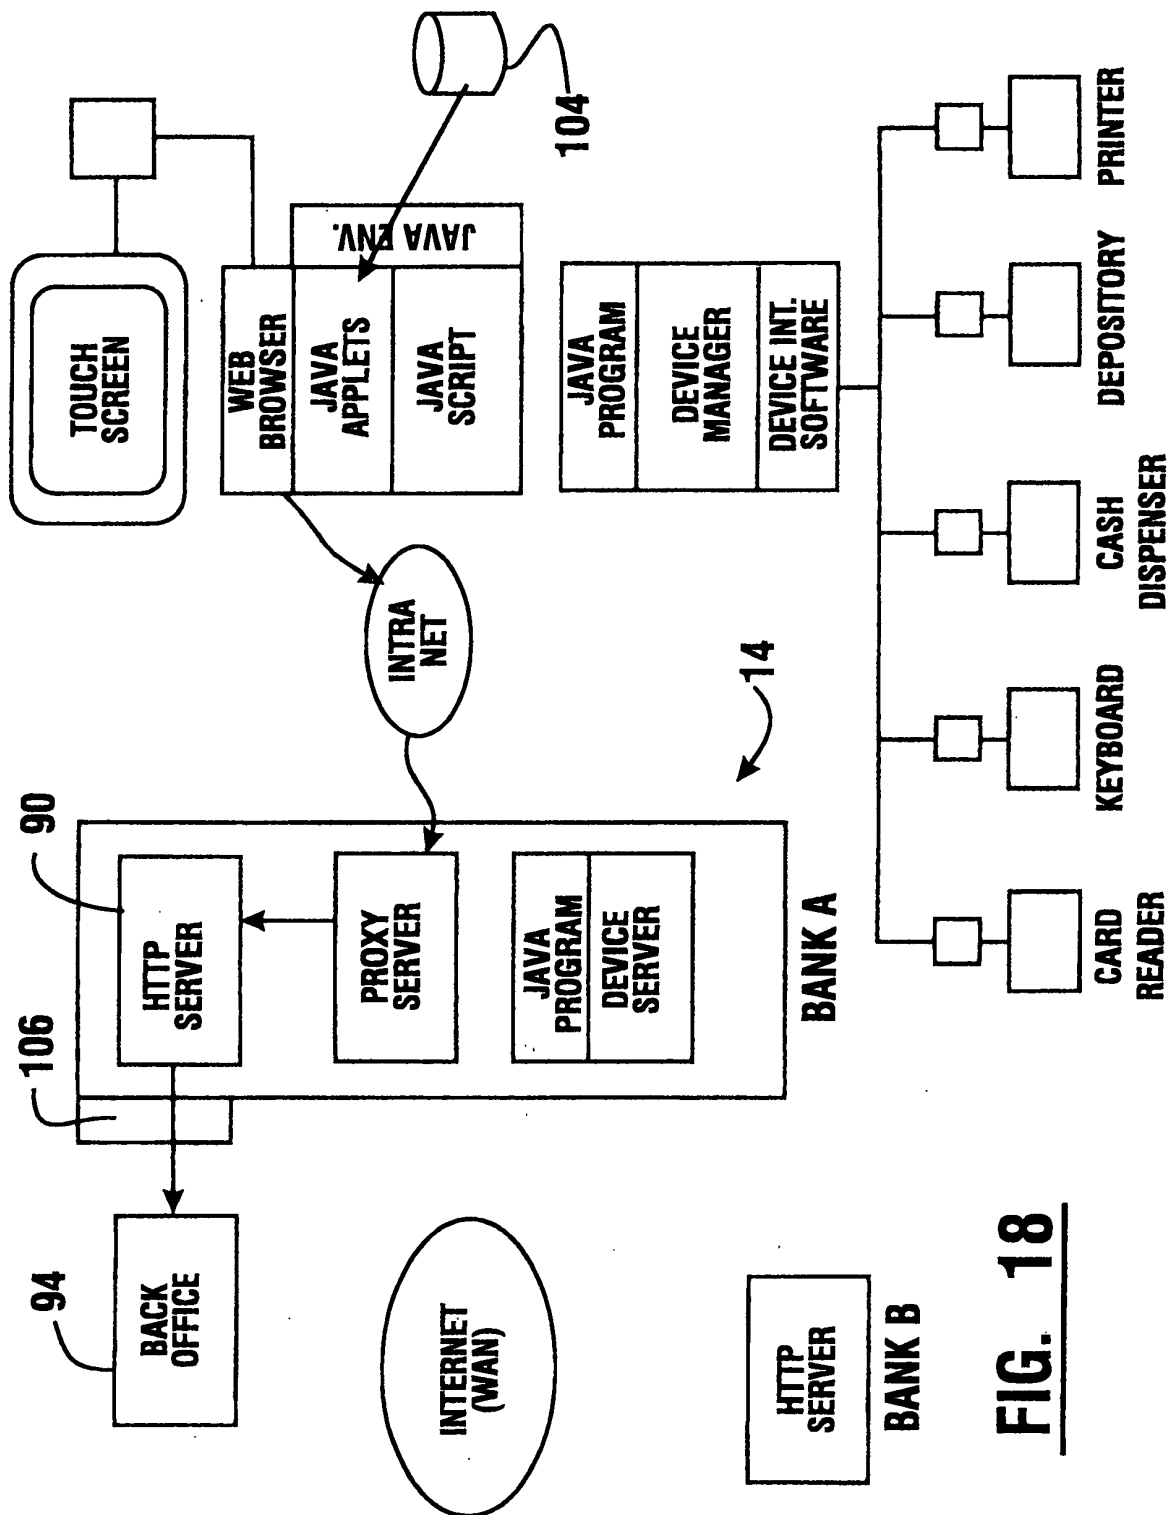


FIG. 18

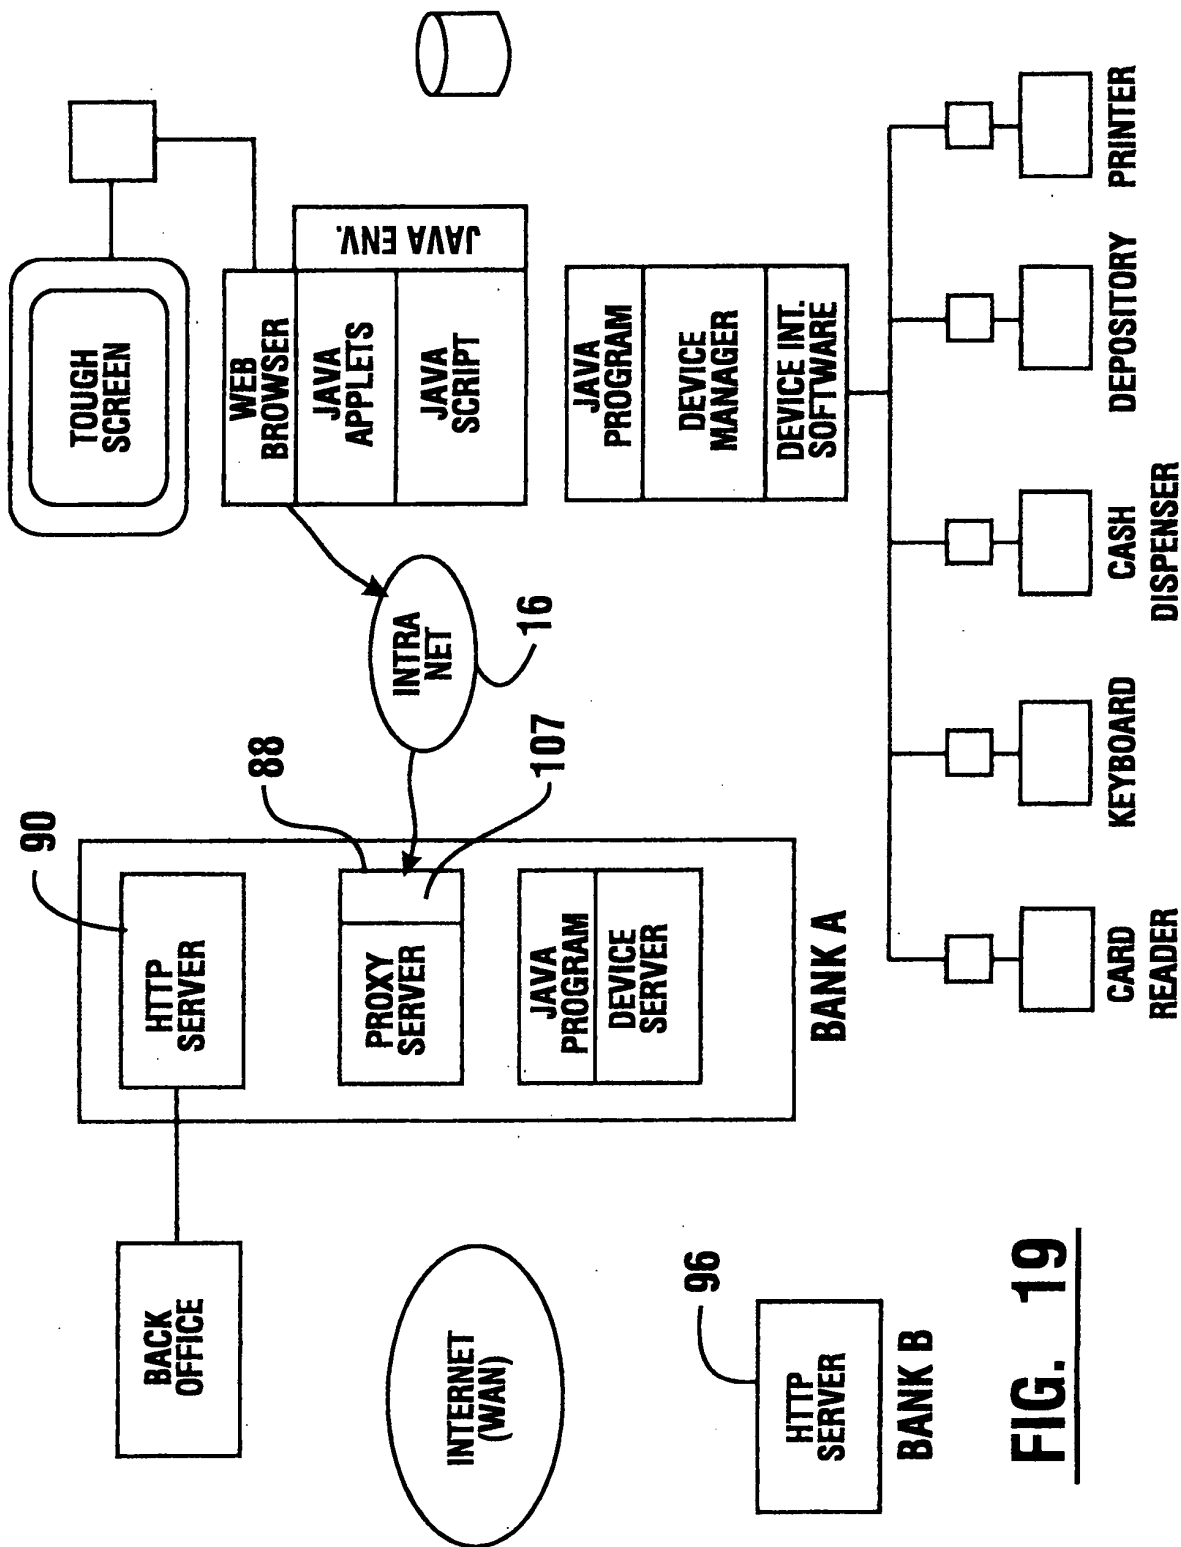


FIG. 19

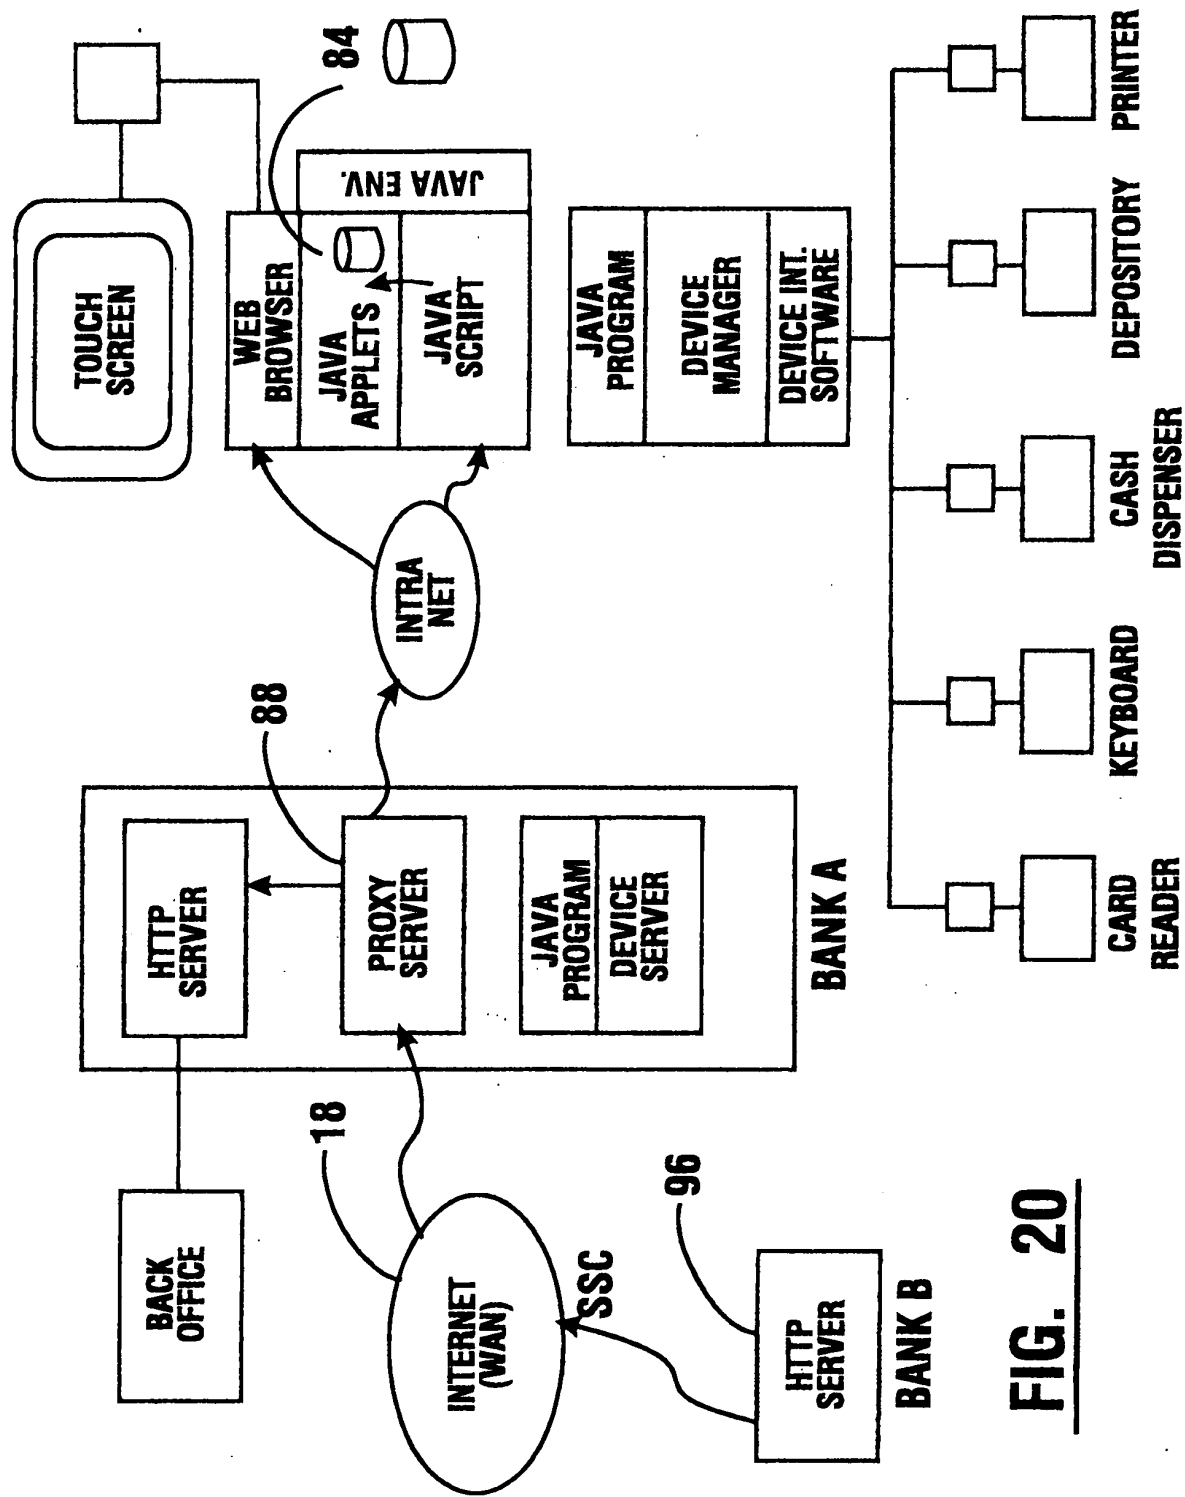
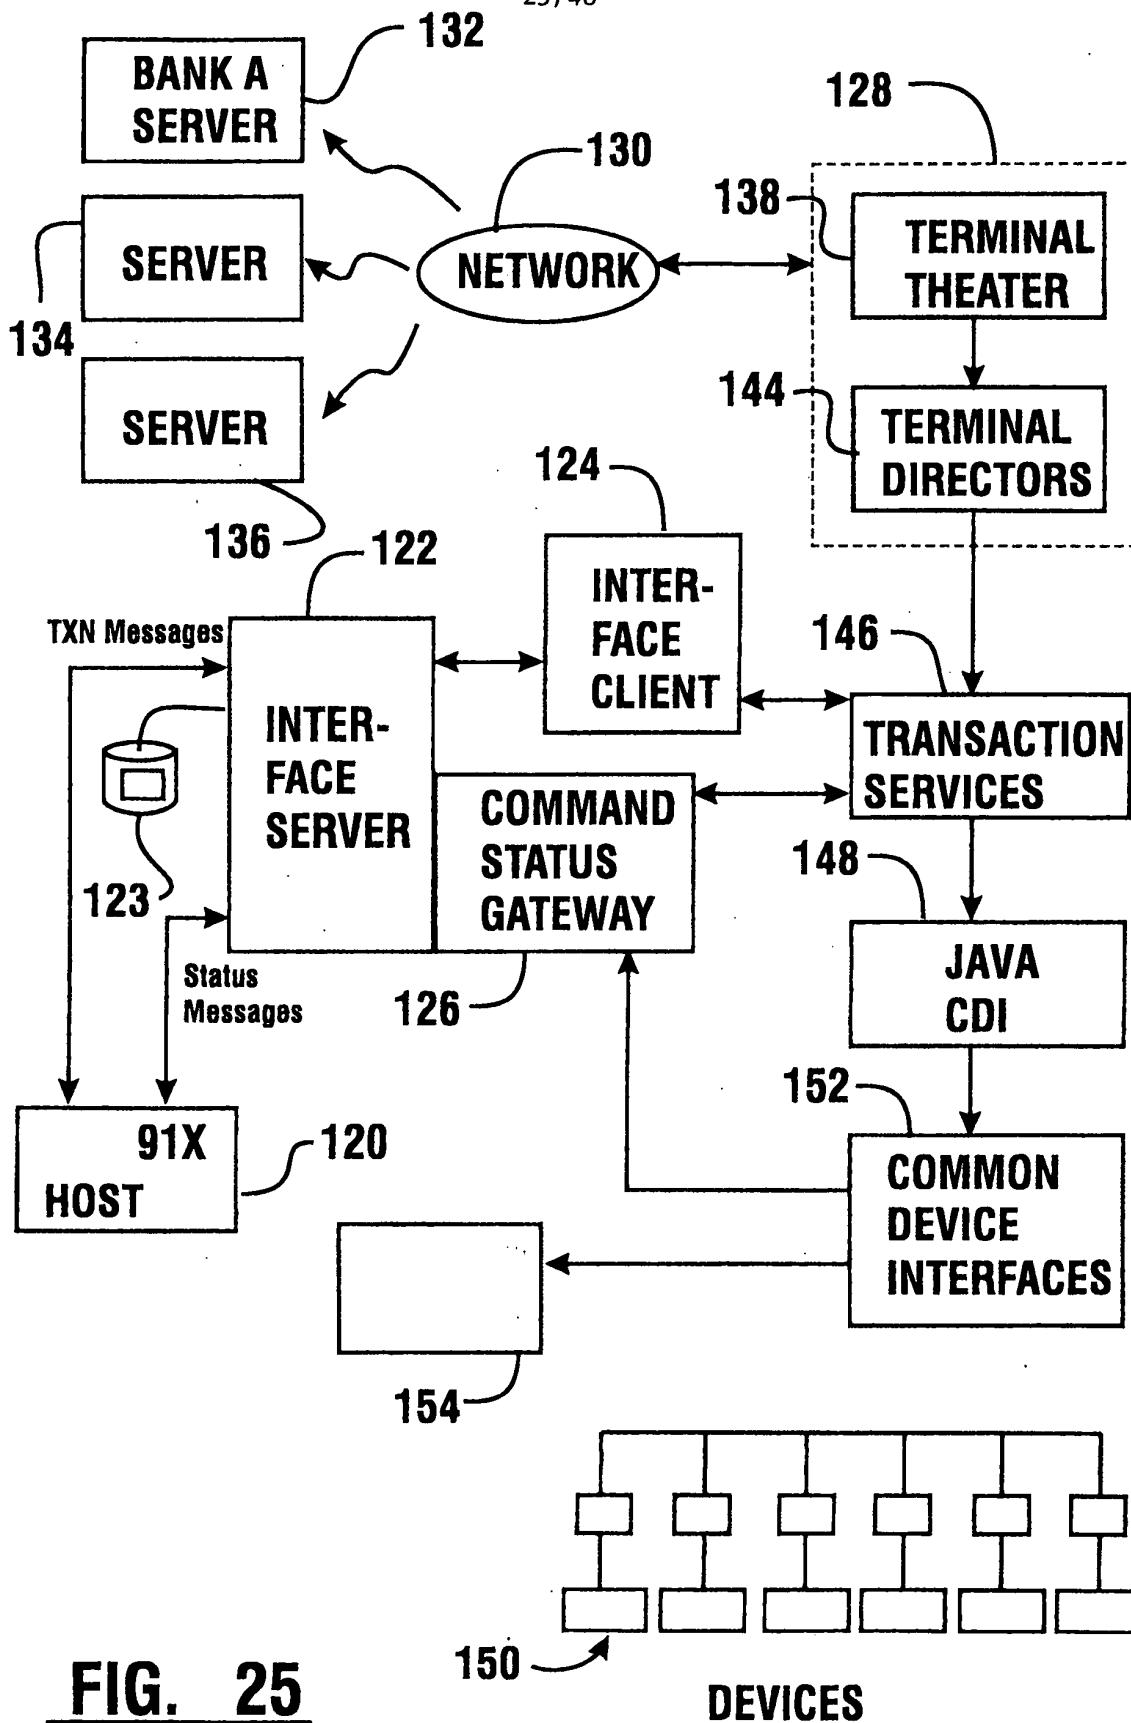
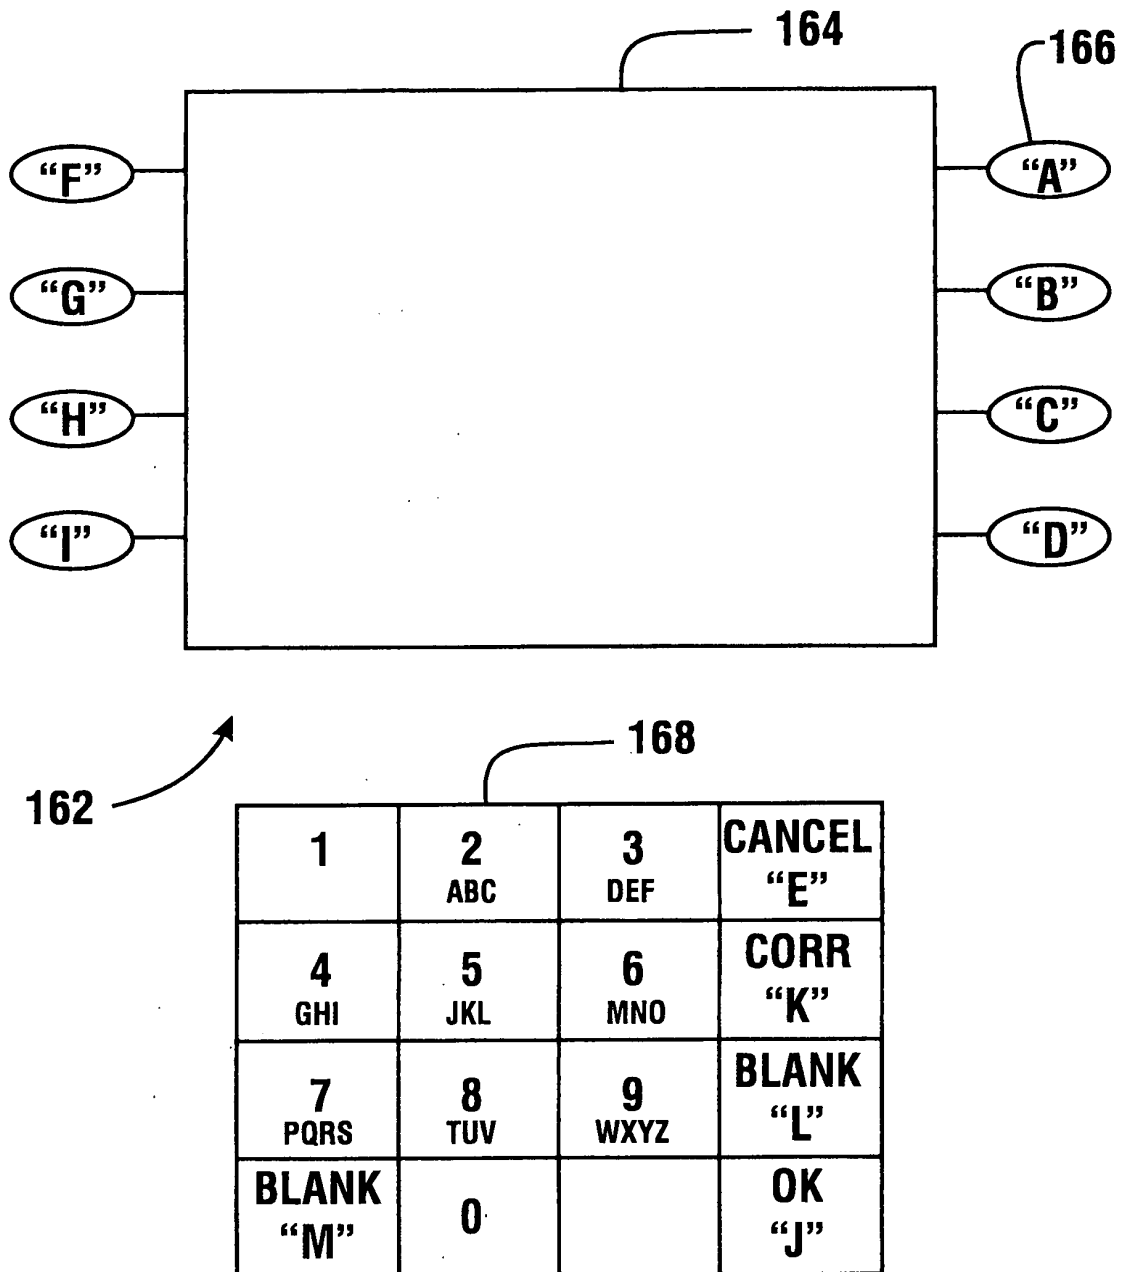
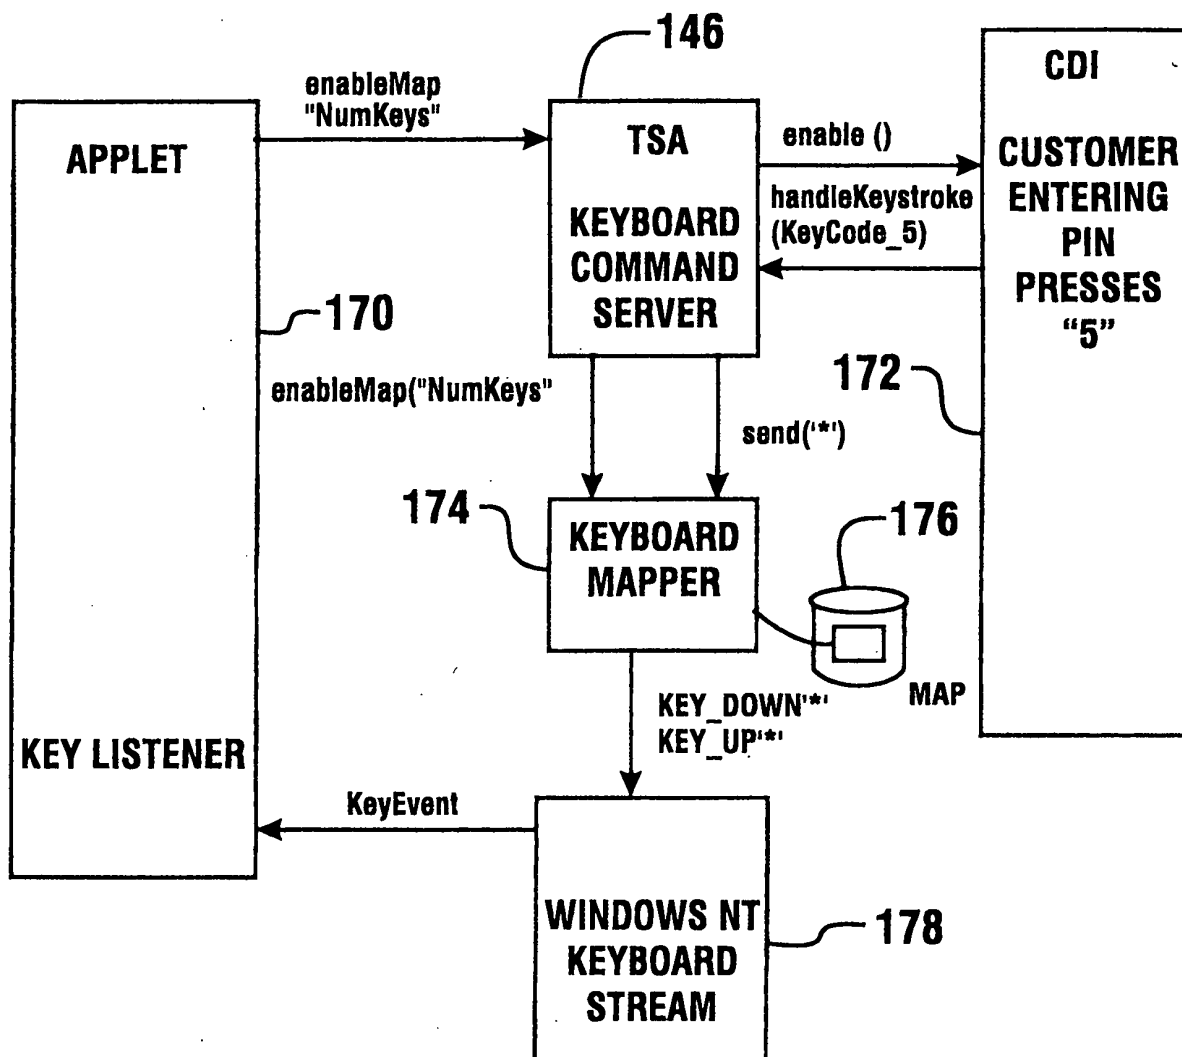



FIG. 20


**FIG. 25**




FIG. 27

**FIG. 28**

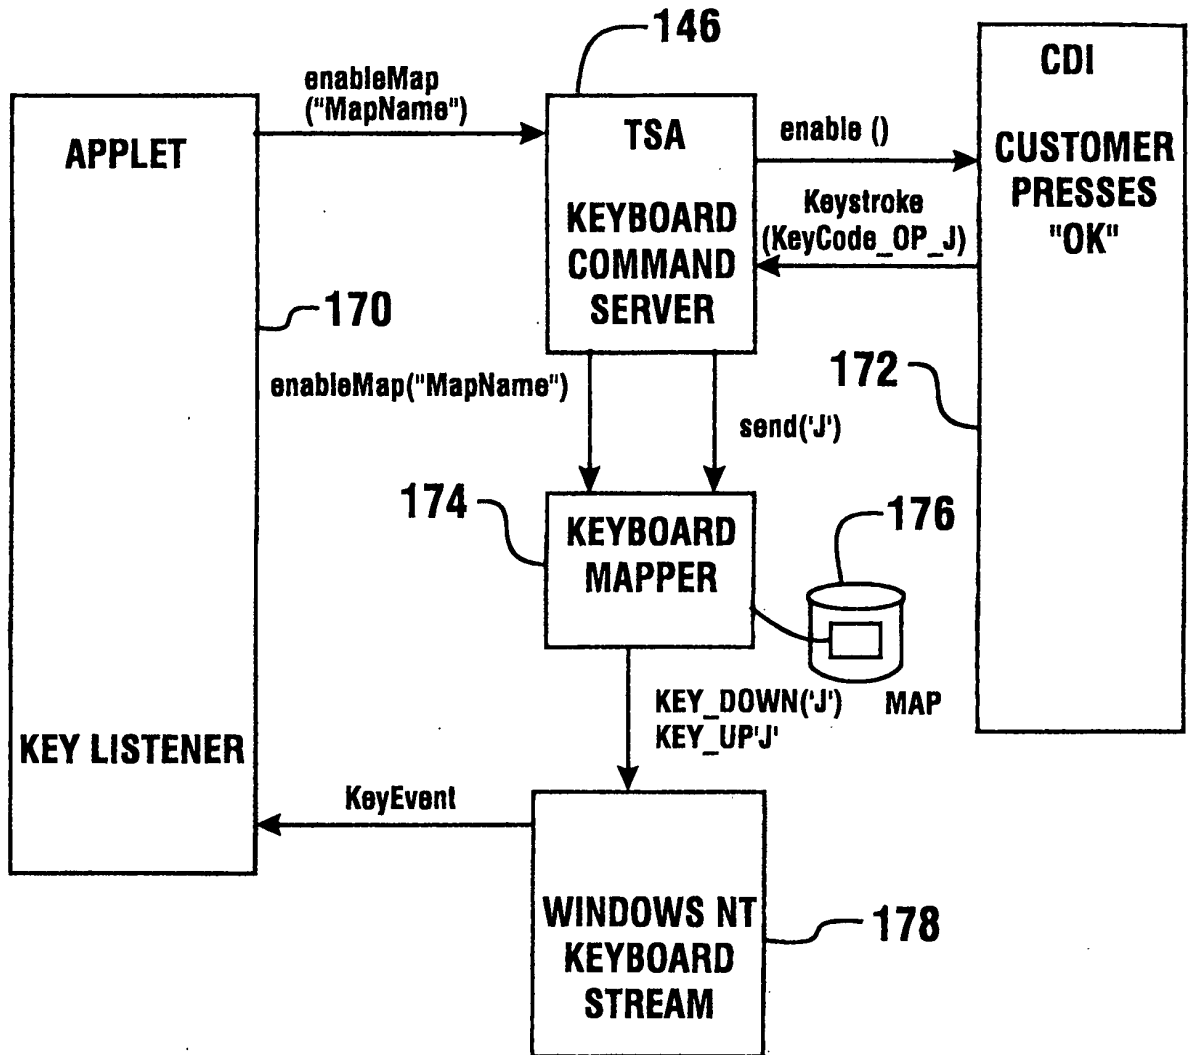**FIG. 29**

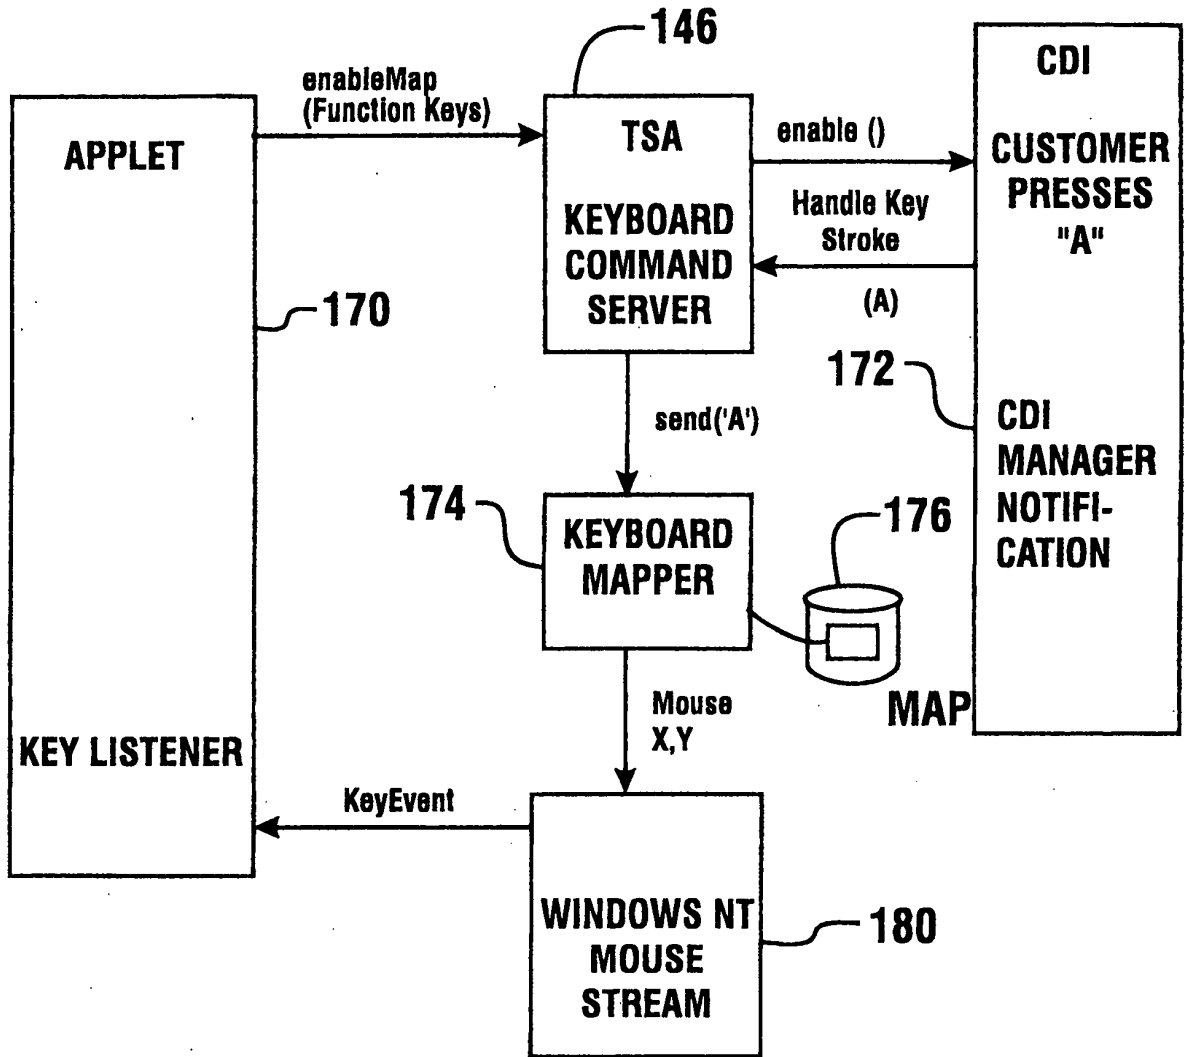**FIG. 30**

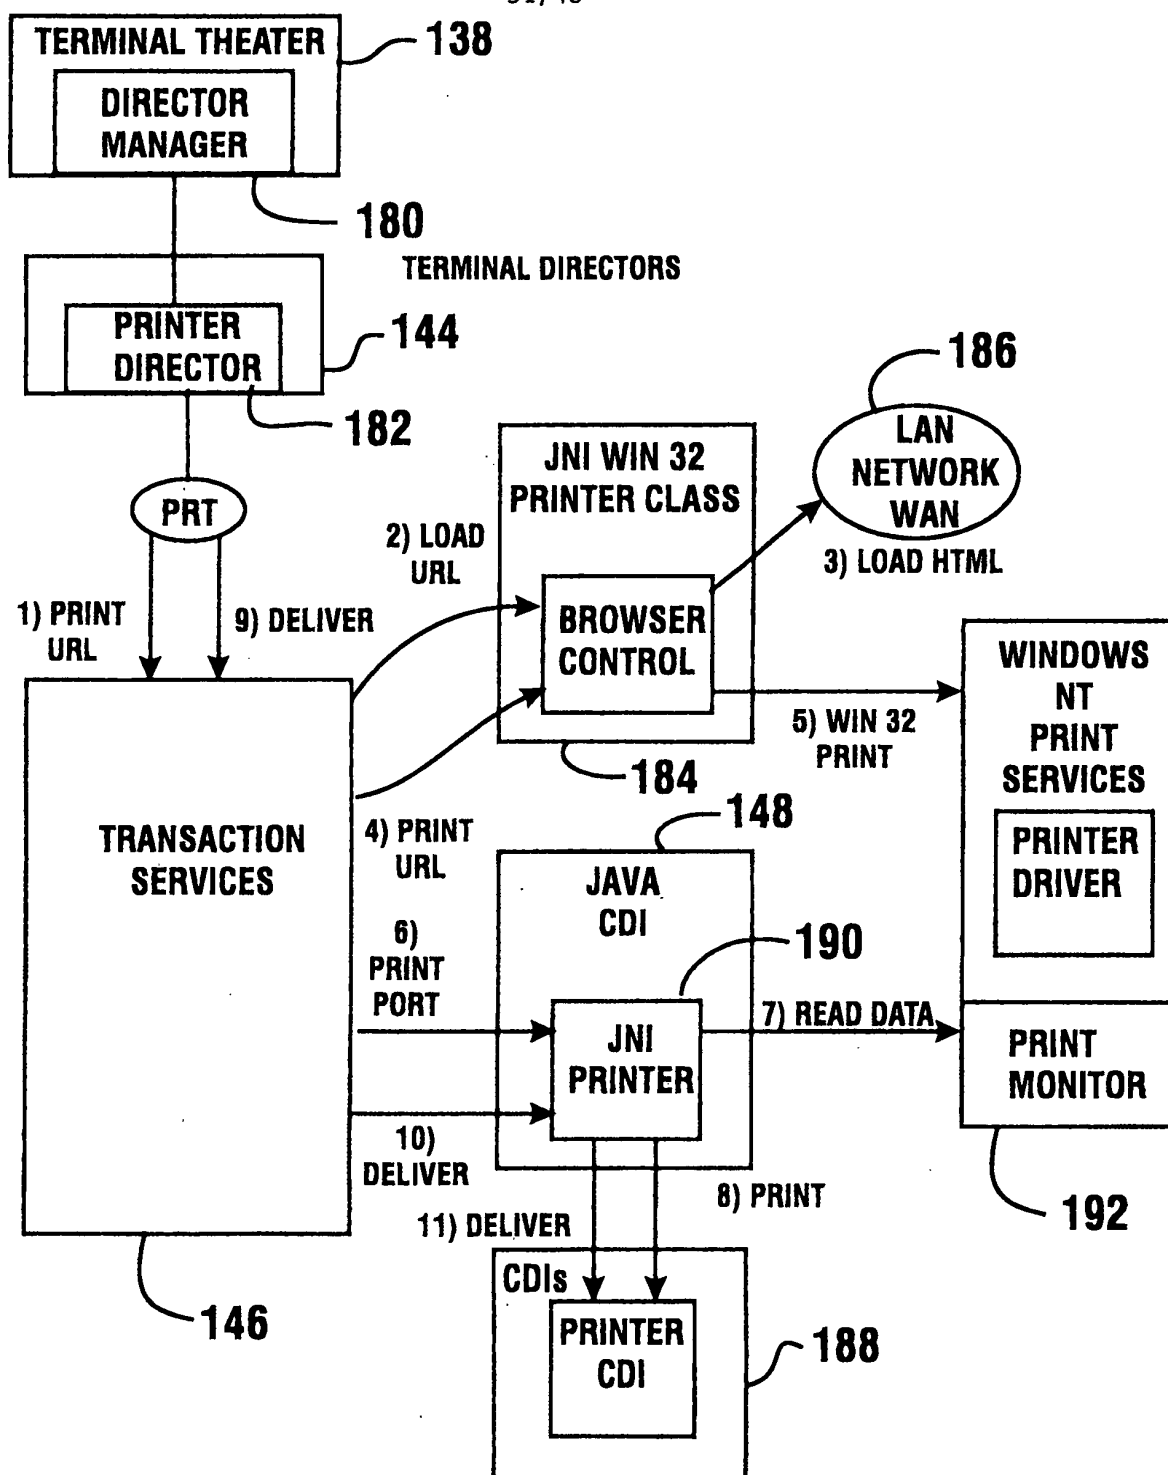**FIG. 31**

004480-01E6960

004730" 0755950


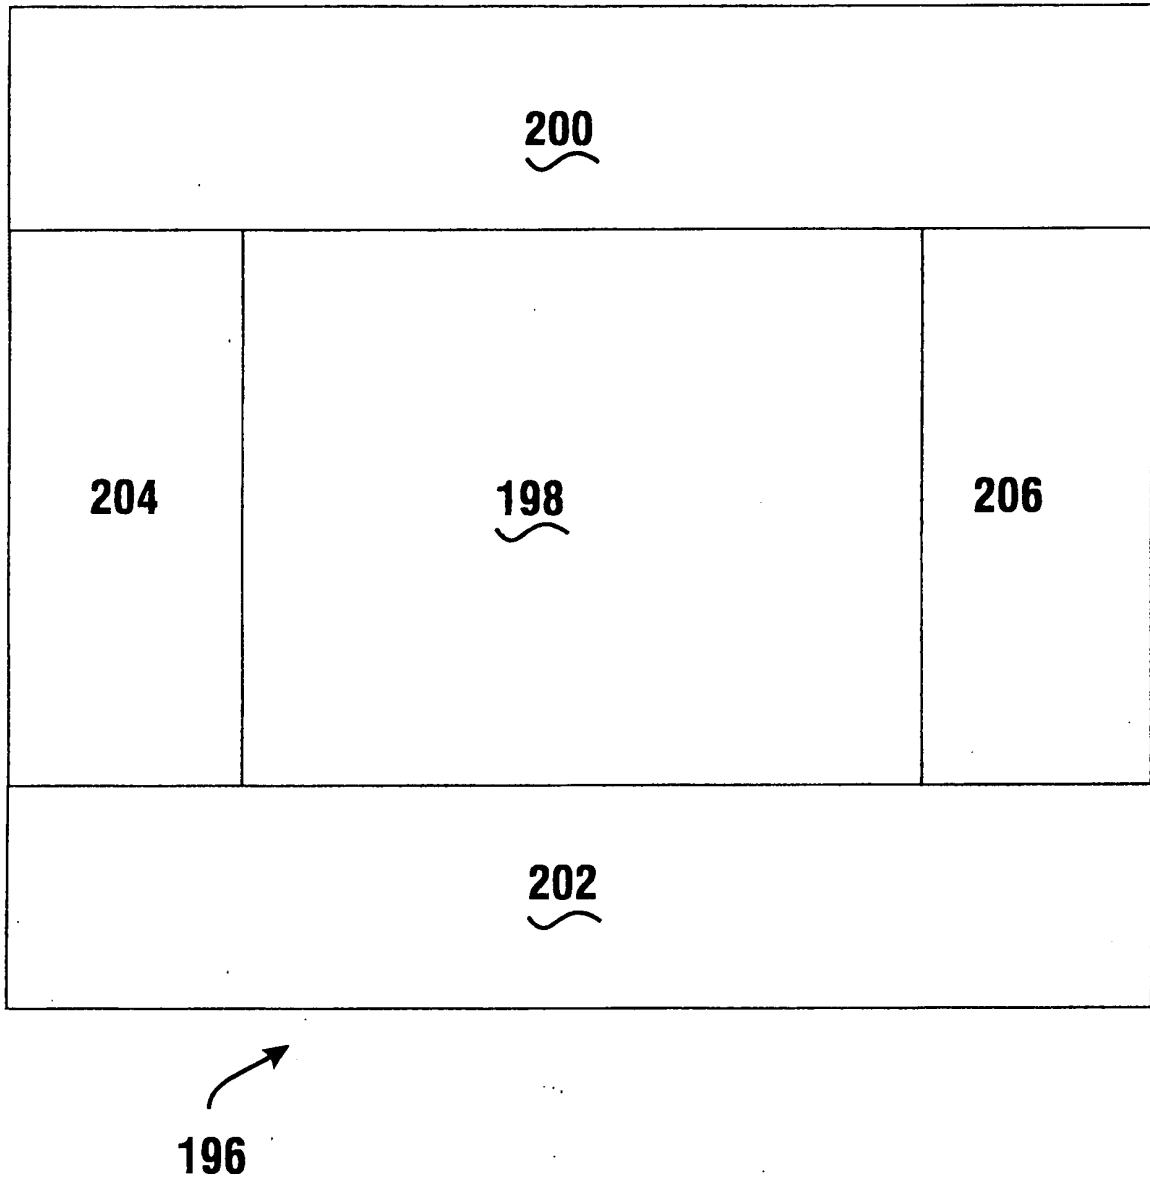


FIG. 32

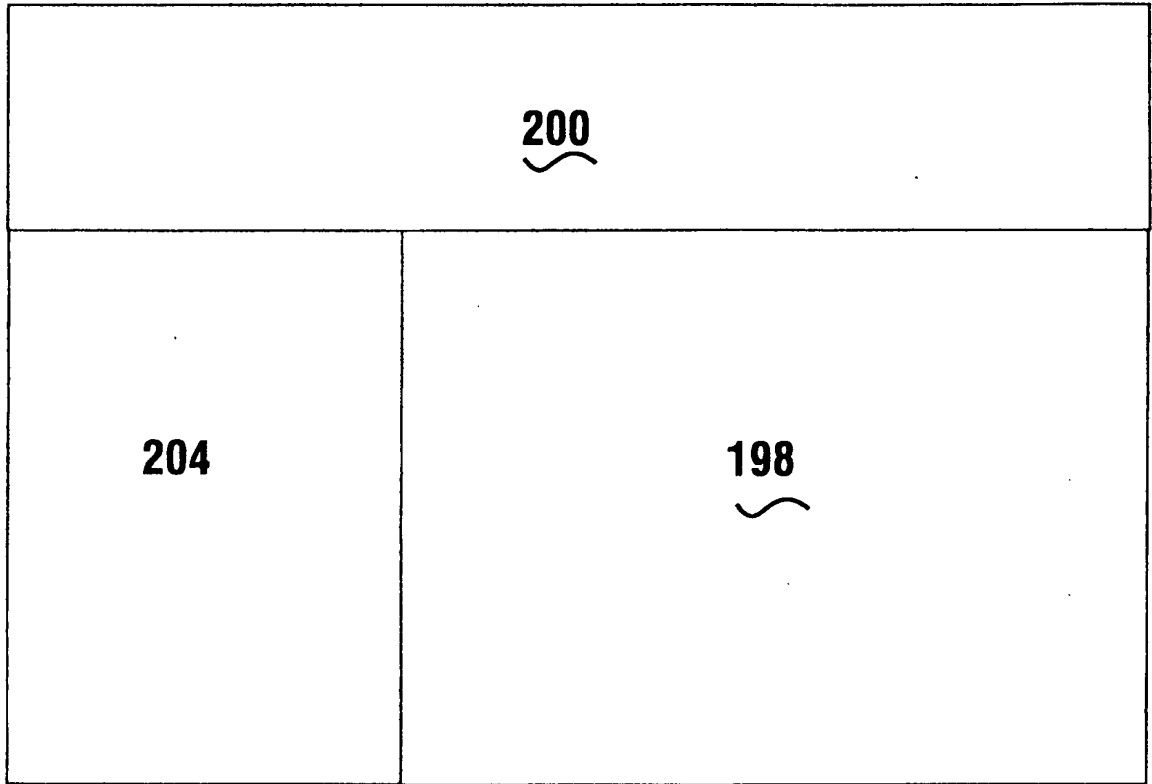


208

An arrow points from the label 208 to the bottom edge of the rectangular structure 200.

FIG. 33


004780" 07E6E960

OUTER "OFFER"

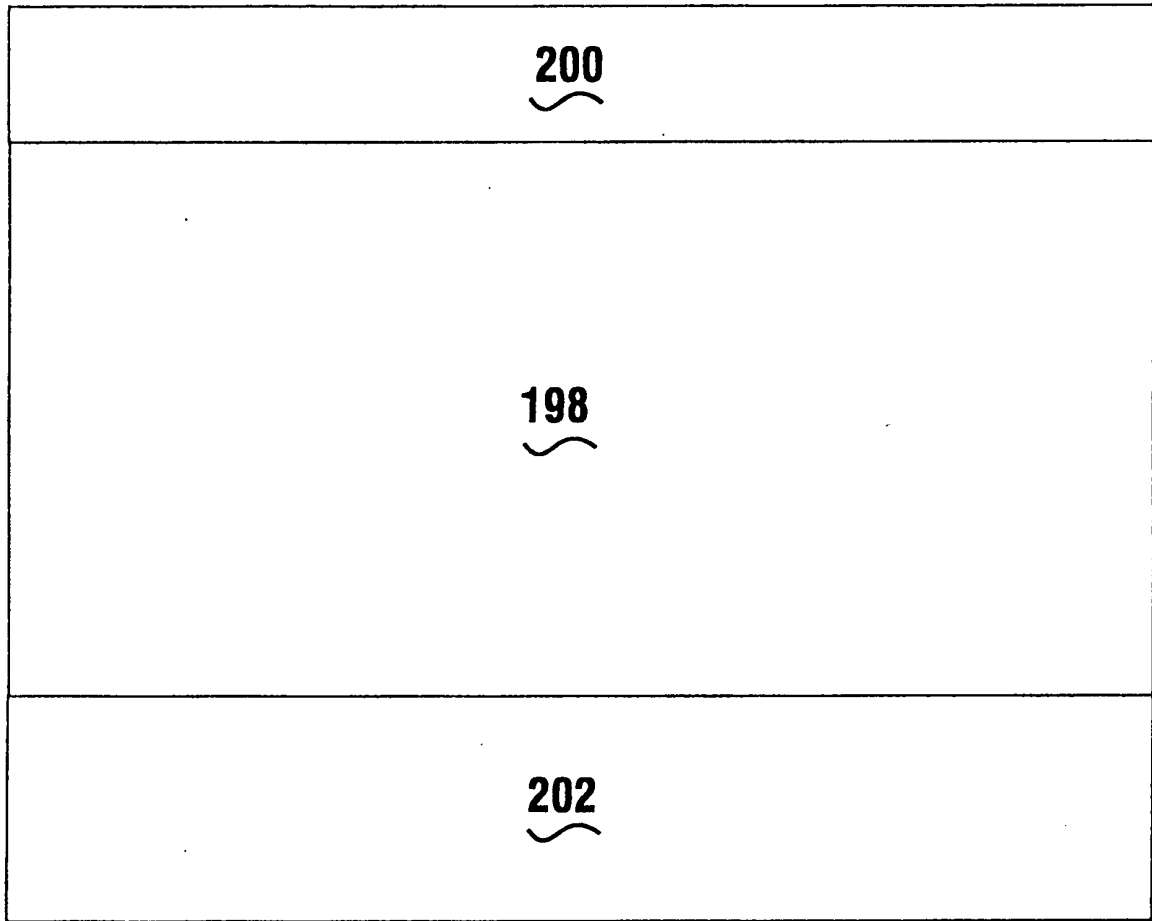

210

FIG. 34

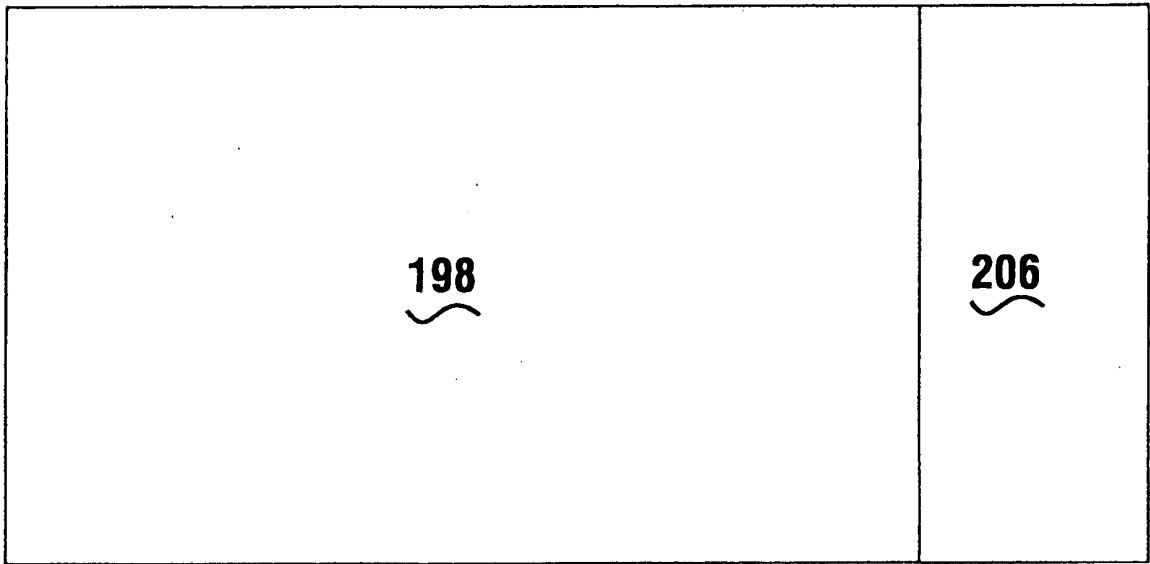

212

FIG. 35

004780" OF E6E960

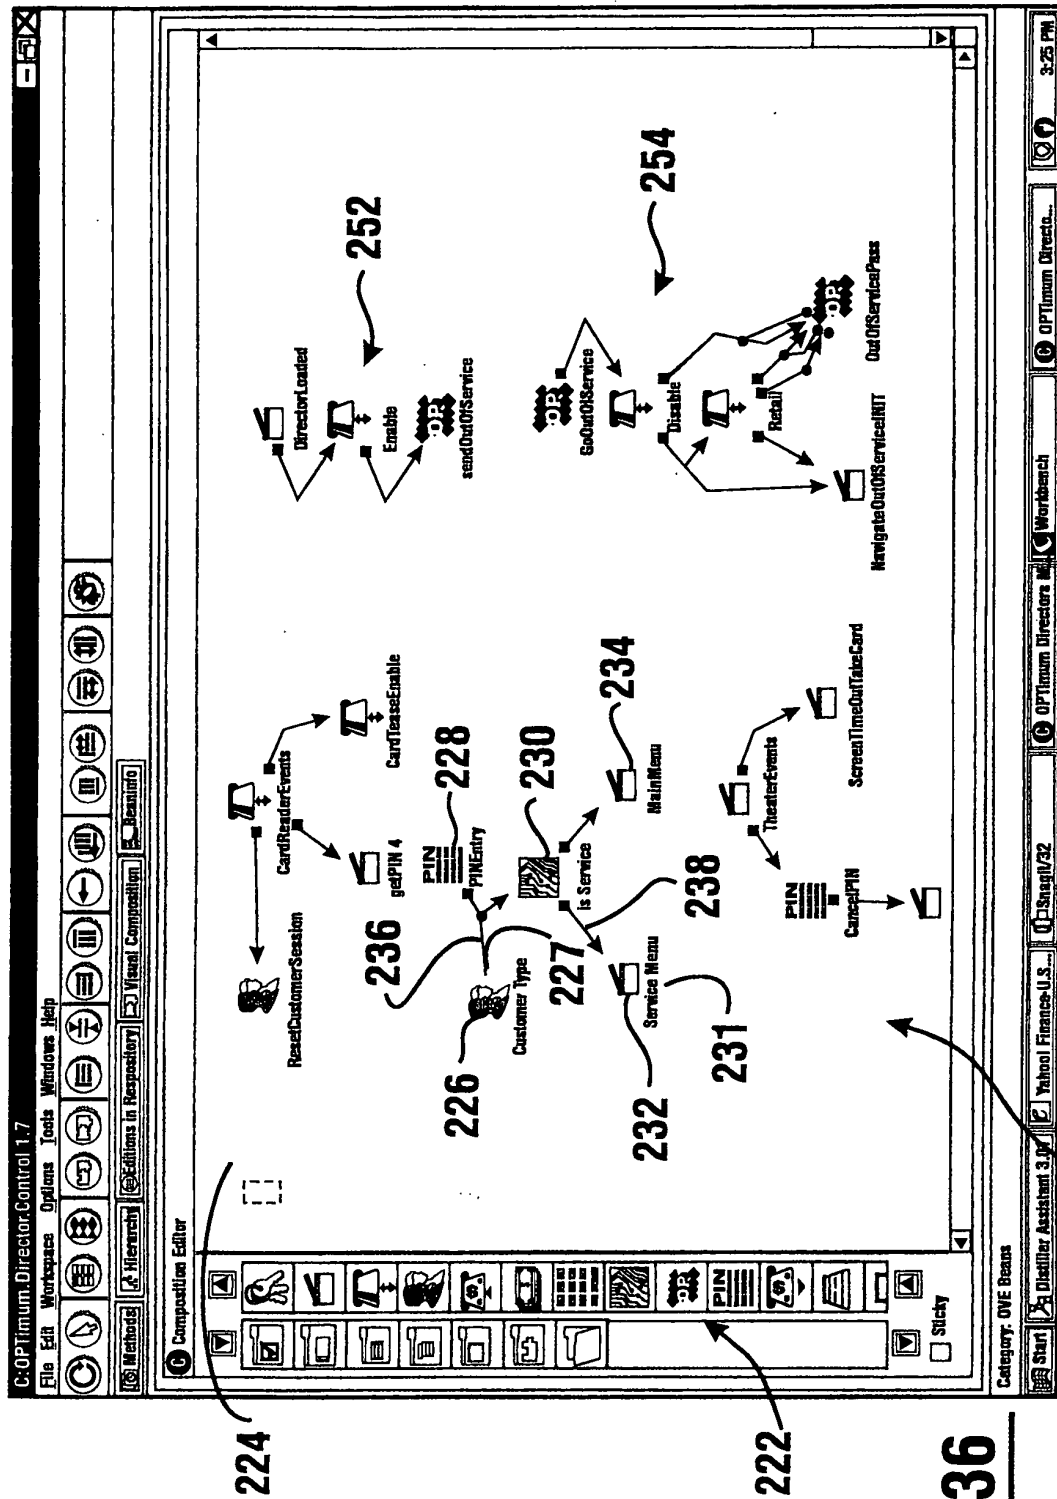


FIG. 36

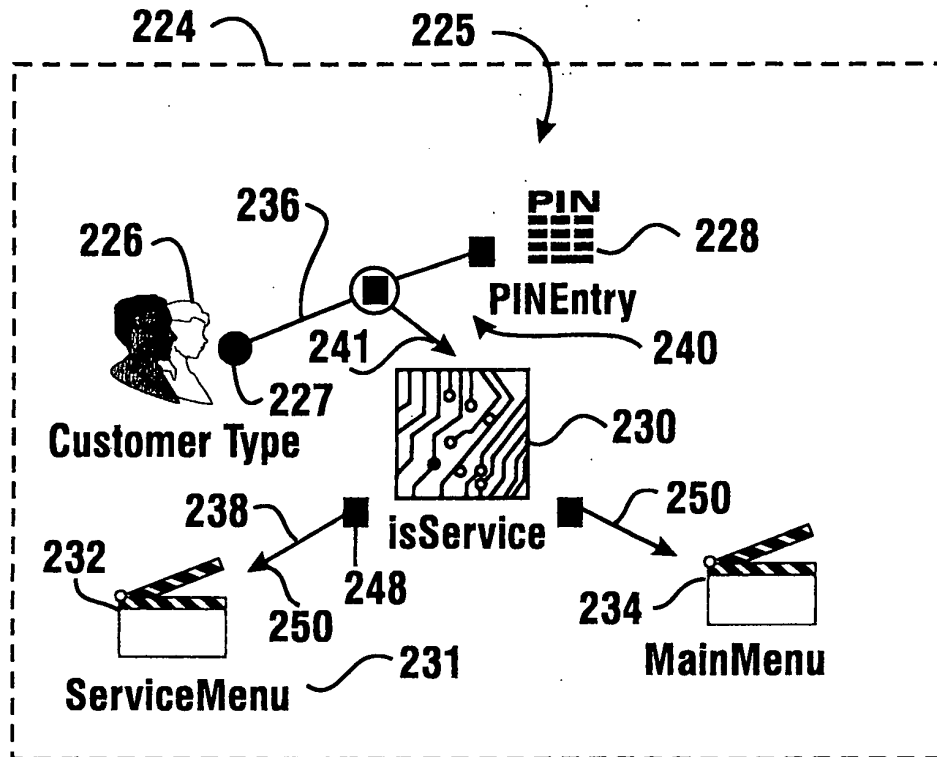


FIG. 37

242 Source Object

243 Source Event

244 Target Object

245 Target Method

246

EVENT TO METHOD CONNECTION - PROPERTIES

isService ["TrueEvent"] → ServiceMenu ["navigateDirector (java.lang.String,java.lang.String,int)"]

☐ Pass event data

Event	Method
FalseEvent	BackStageControl[]
this	convertErrorConditions
TrueEvent	navigate(java.lang.String,int)
	navigateDirector(java.lang.String,java.lang.String,int)

☐ Show expert features

Select source event and target method for this connection.

OK Cancel Reset Delete Set Parameters Help

FIG. 38





























Icon	OPTInet bean	Description
260 	Authorize	Interacts with Authorization Plug-in to manage Authorization, Commit, and Reverse requests to the authorization agent.
262 	BackStageControl	Uses the services of DirectorManager to control the URL property of the browser, to load directors, and to receive events from the browser.
264 	CardRead	Device Control
266 	Customer Profile	Interacts with the CustomerProfile Plug-ins to capture and retrieve information about a customer.
268 	Depositor	Device Control
270 	Dispenser	Device Control
272 	Keypad	Device Control
274 	Logic bean	Determines the truth value of comparisons between two operands.
276 	OCS bean	Interacts with the OCS Server and the Command/Status Plug-in so that host commands and host command responses can be processed by directors.
278 	Presenter	Device Control
280 	PINEntry	Interacts with the PINEntryEvent Server to manage the PIN Entry mode.
282 	Printer	Device Control
284 	Sync	Synchronizes two forked processing paths and provides a timer for one or two processing paths.
286 	TransactionData	Provides a repository of data that can be shared among directors, the browser, and the authorization agent.

FIG. 39

**FIG. 40****FIG. 41**

**FIG. 42****FIG. 43****FIG. 44****FIG. 45**

**FIG. 46****FIG. 47****FIG. 48****FIG. 49**

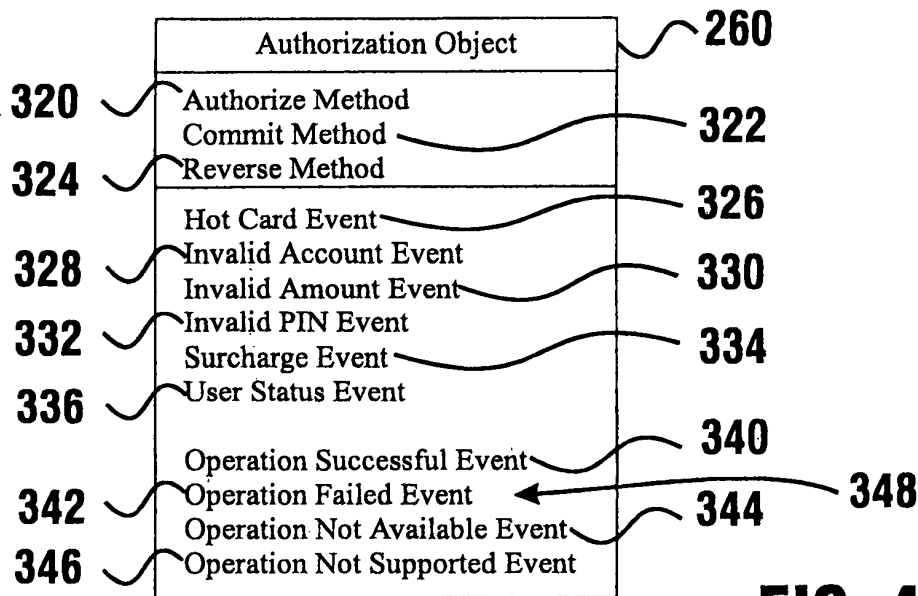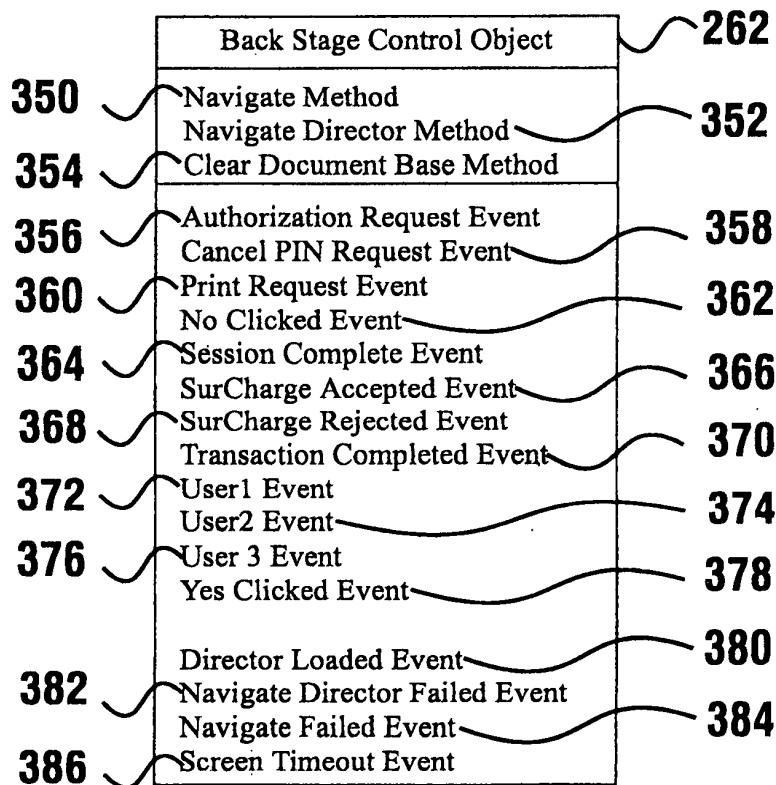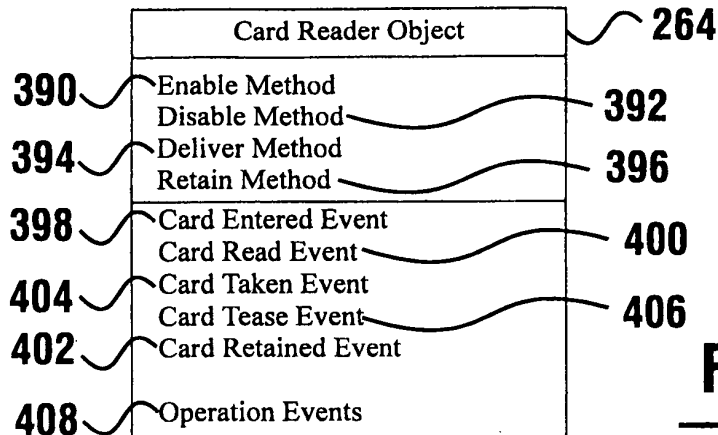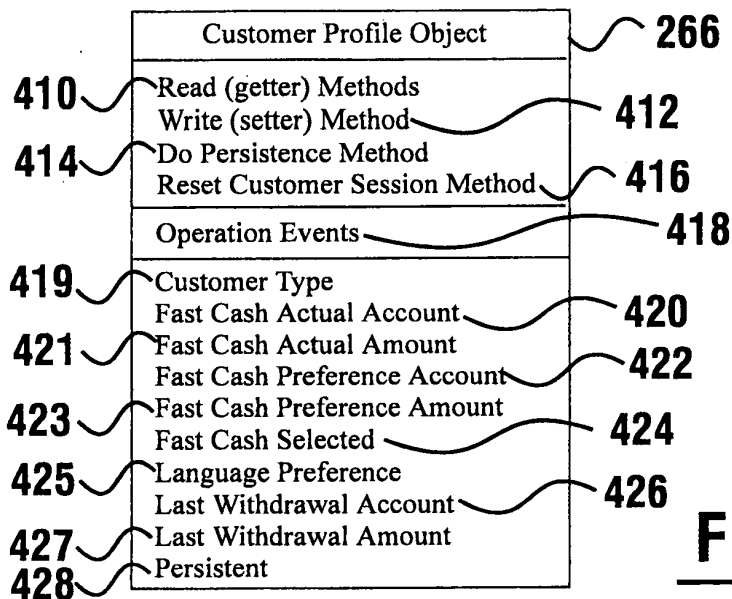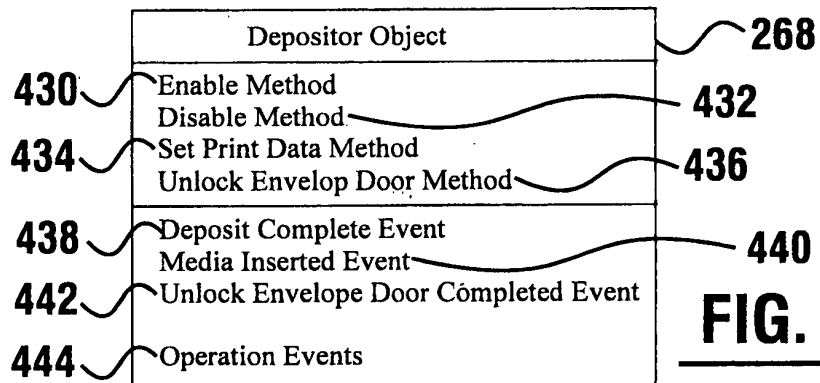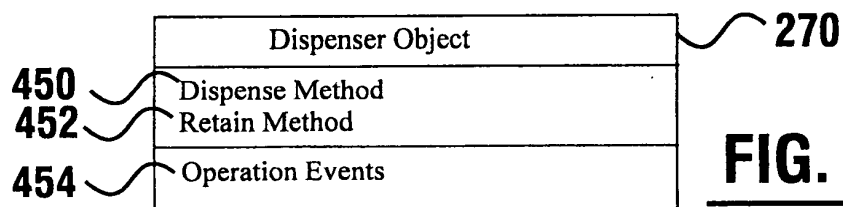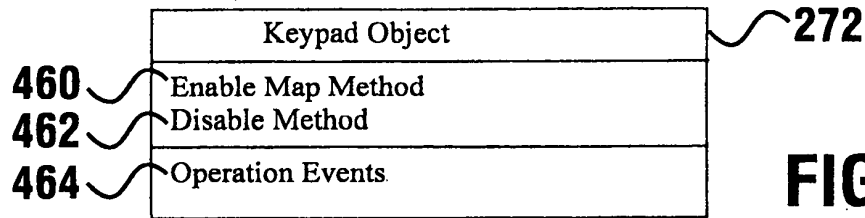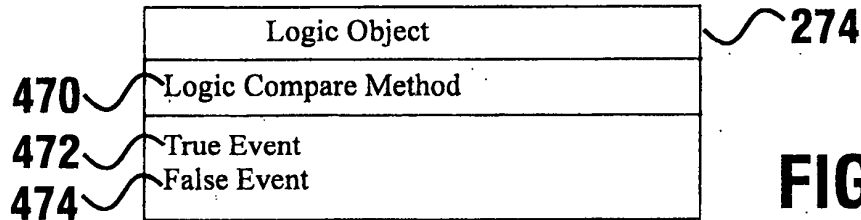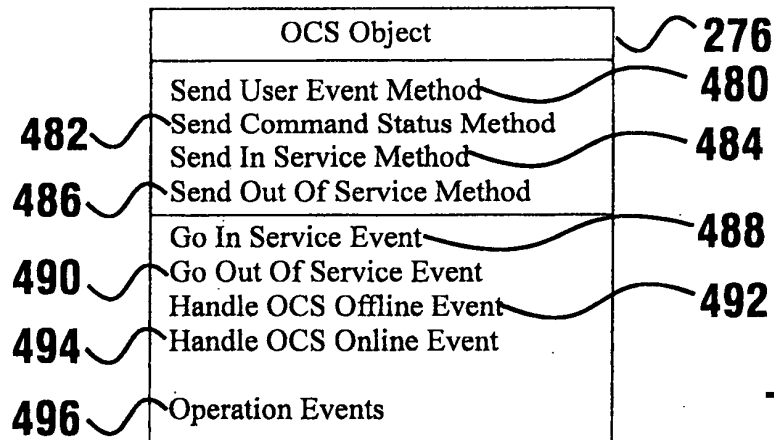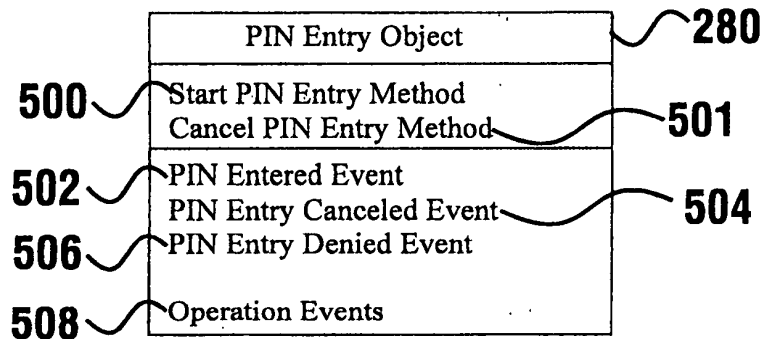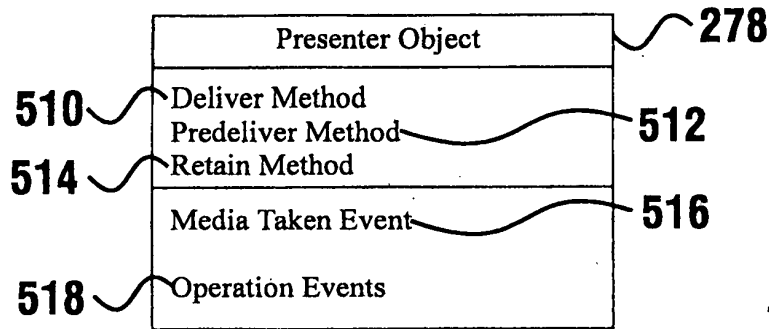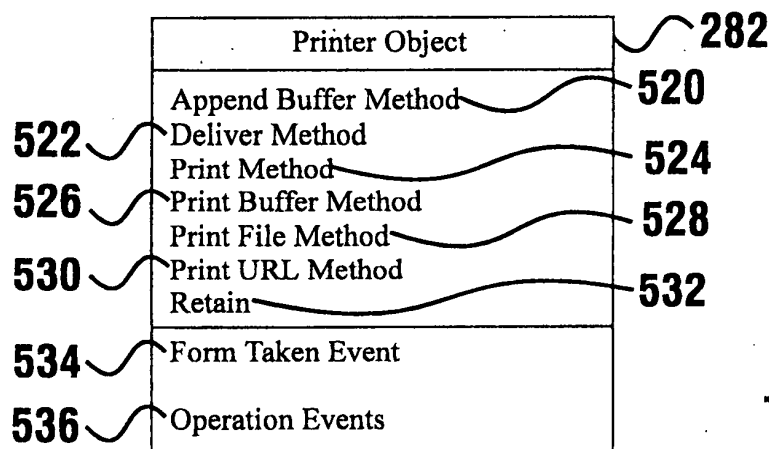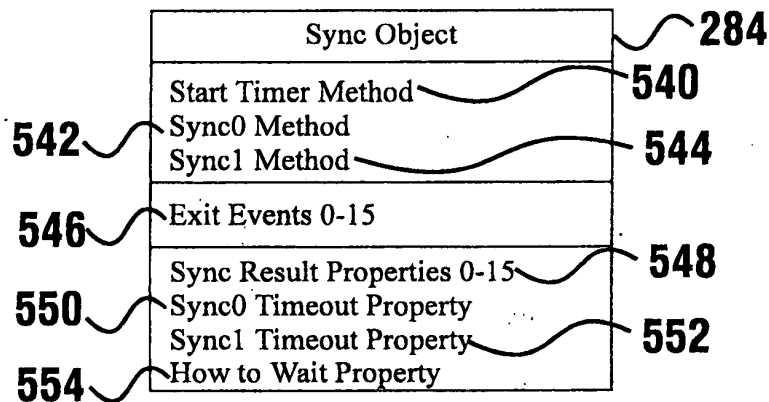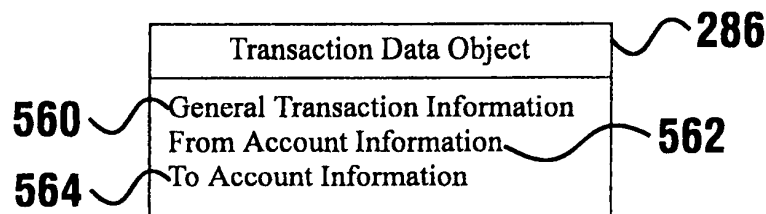**FIG. 50****FIG. 51****FIG. 52****FIG. 53**




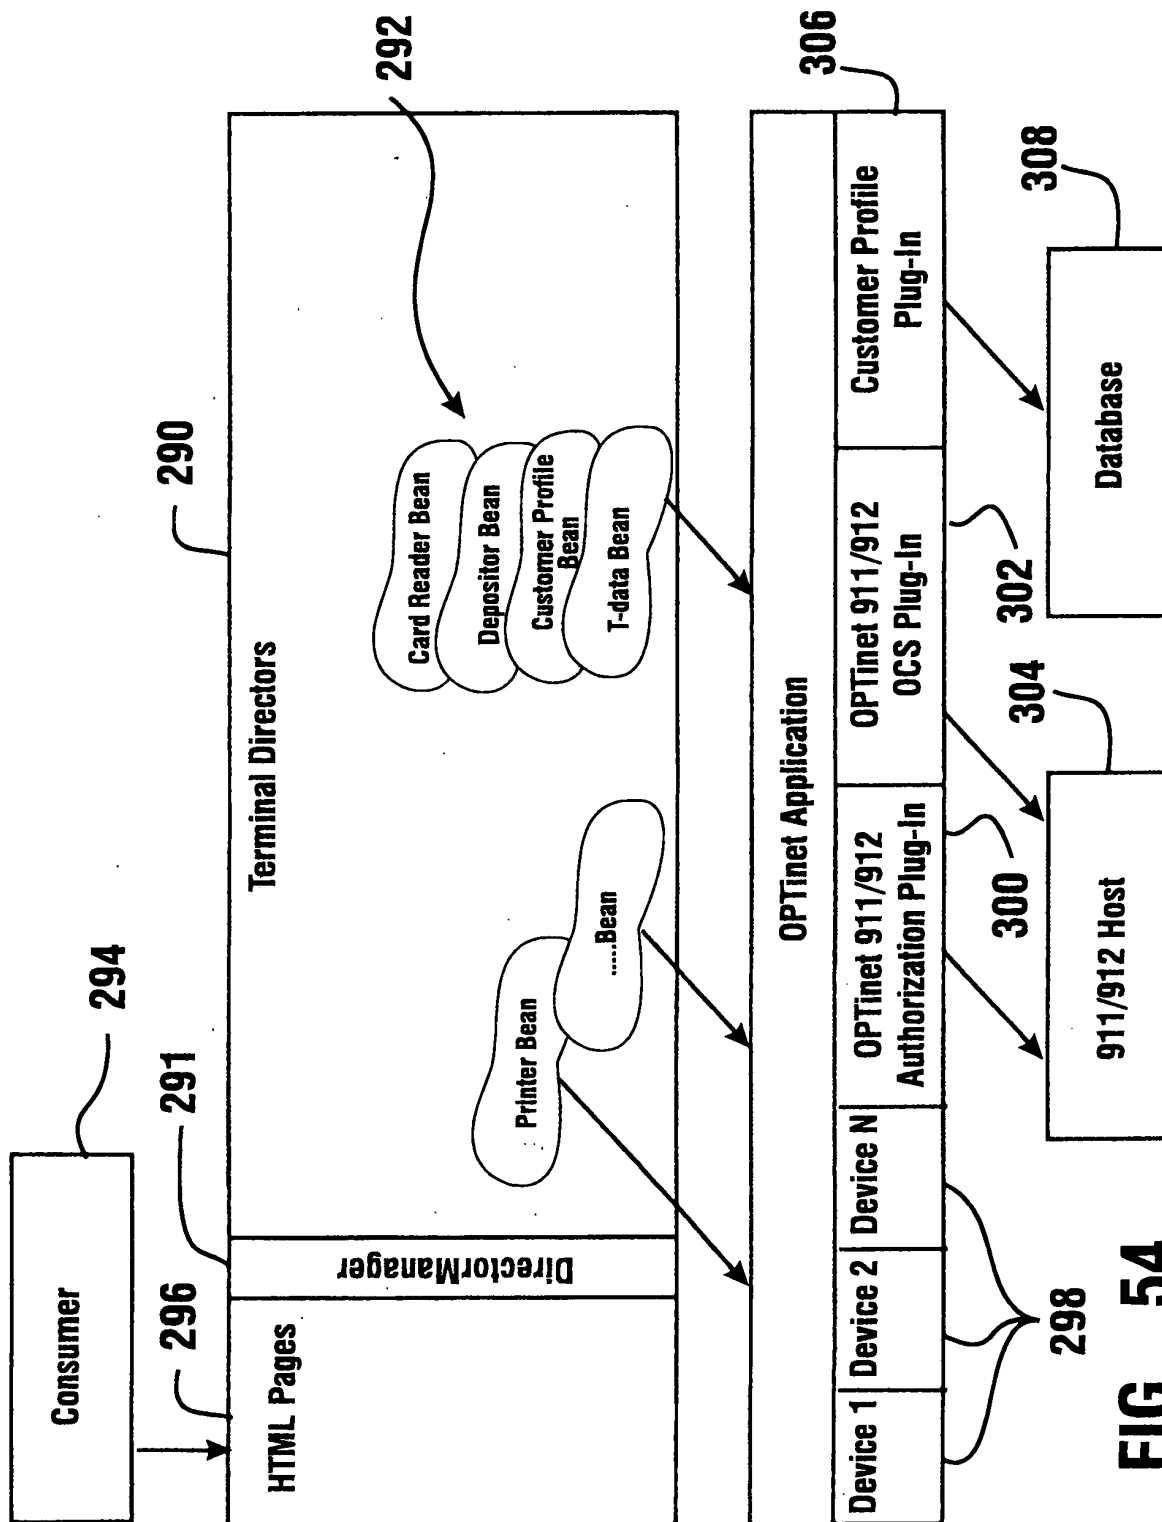



FIG. 54


**FIG. 55**

700

**FIG. 56**

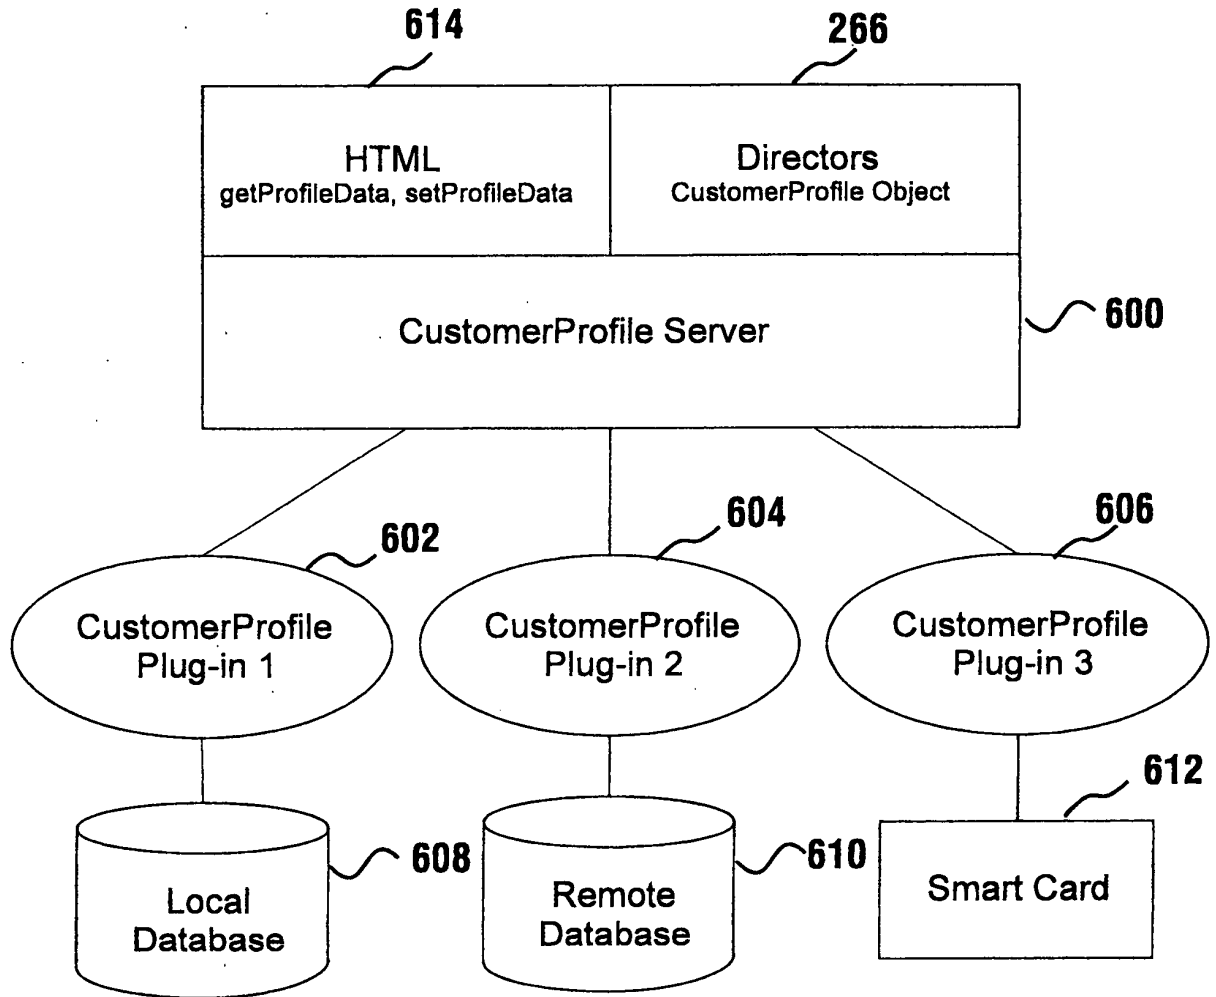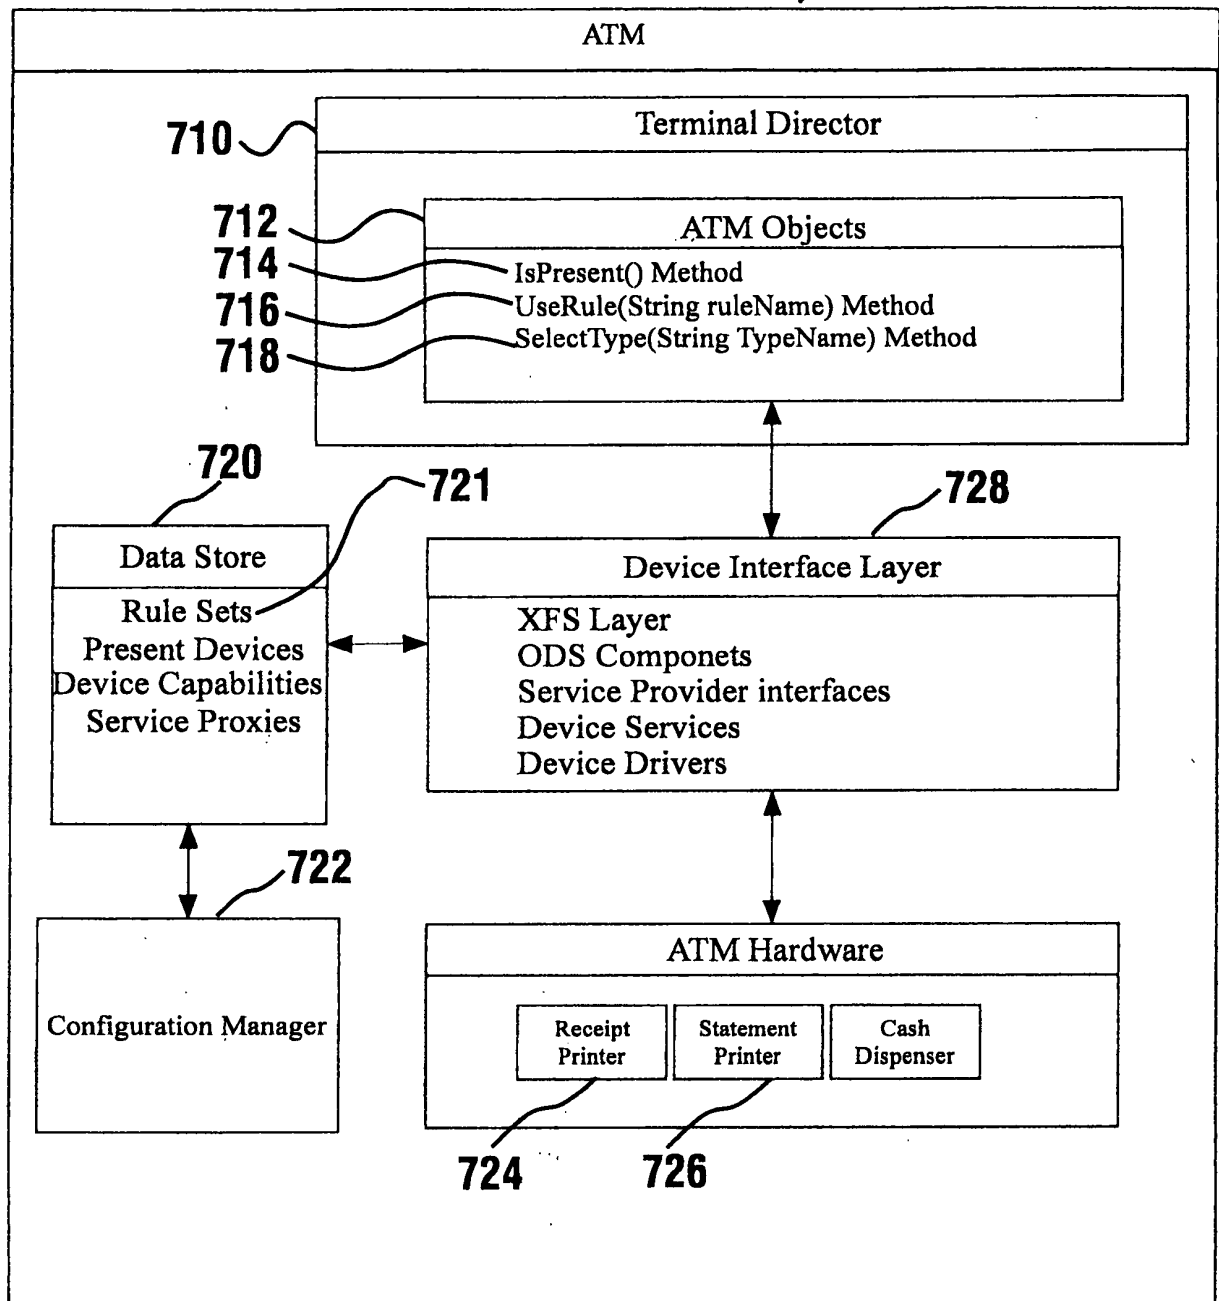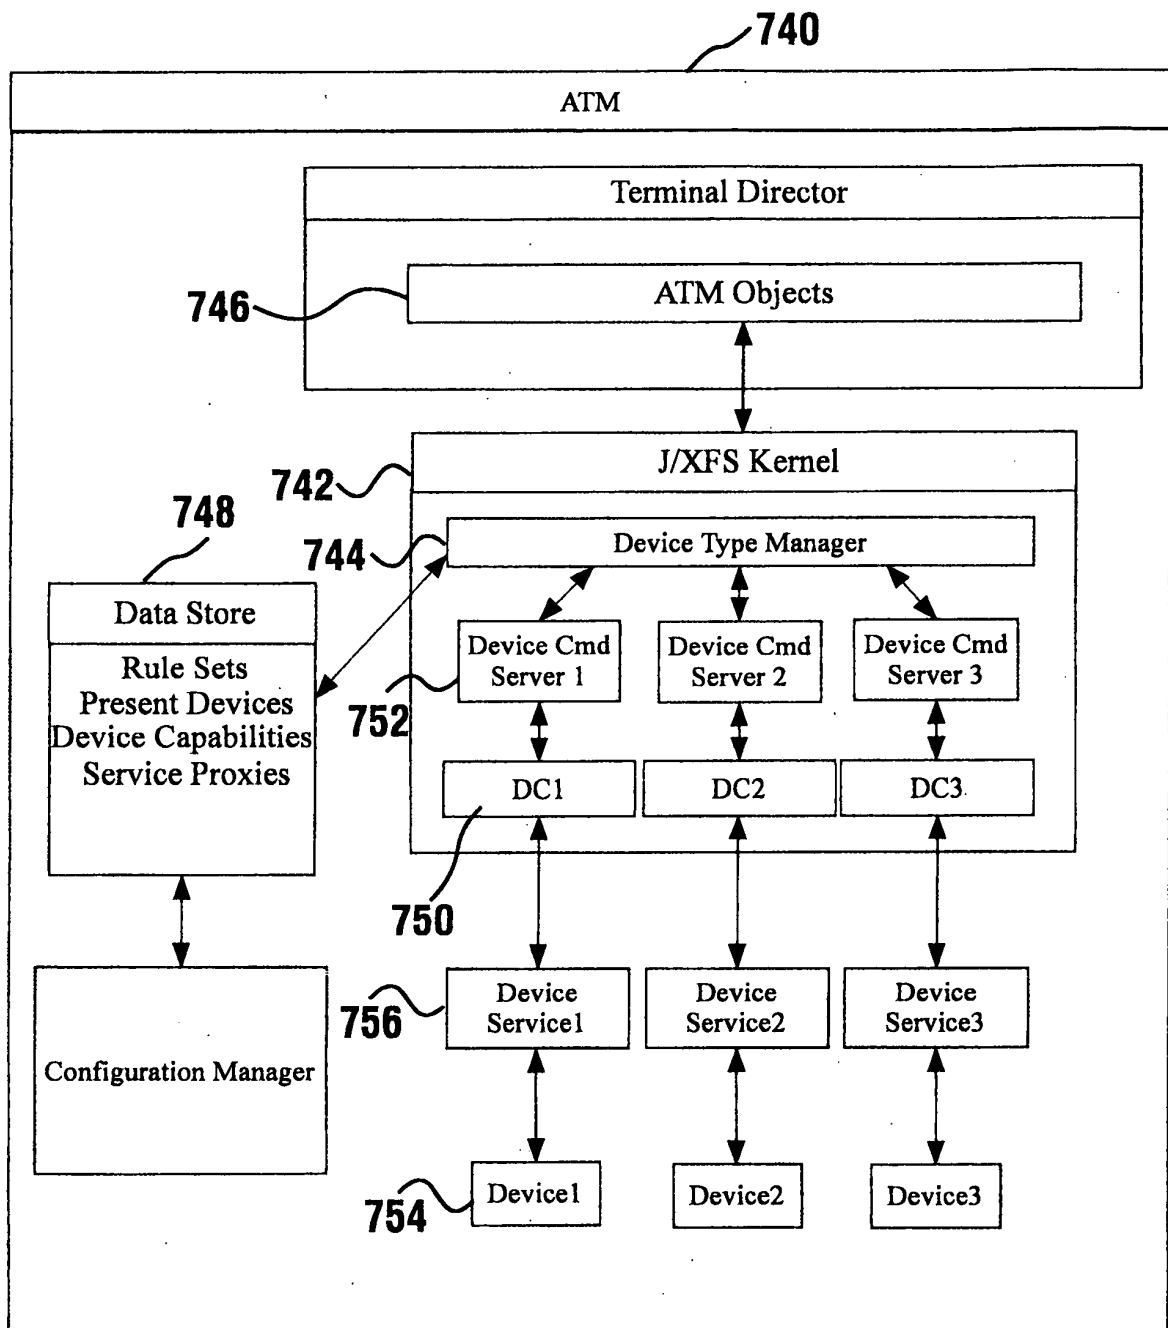

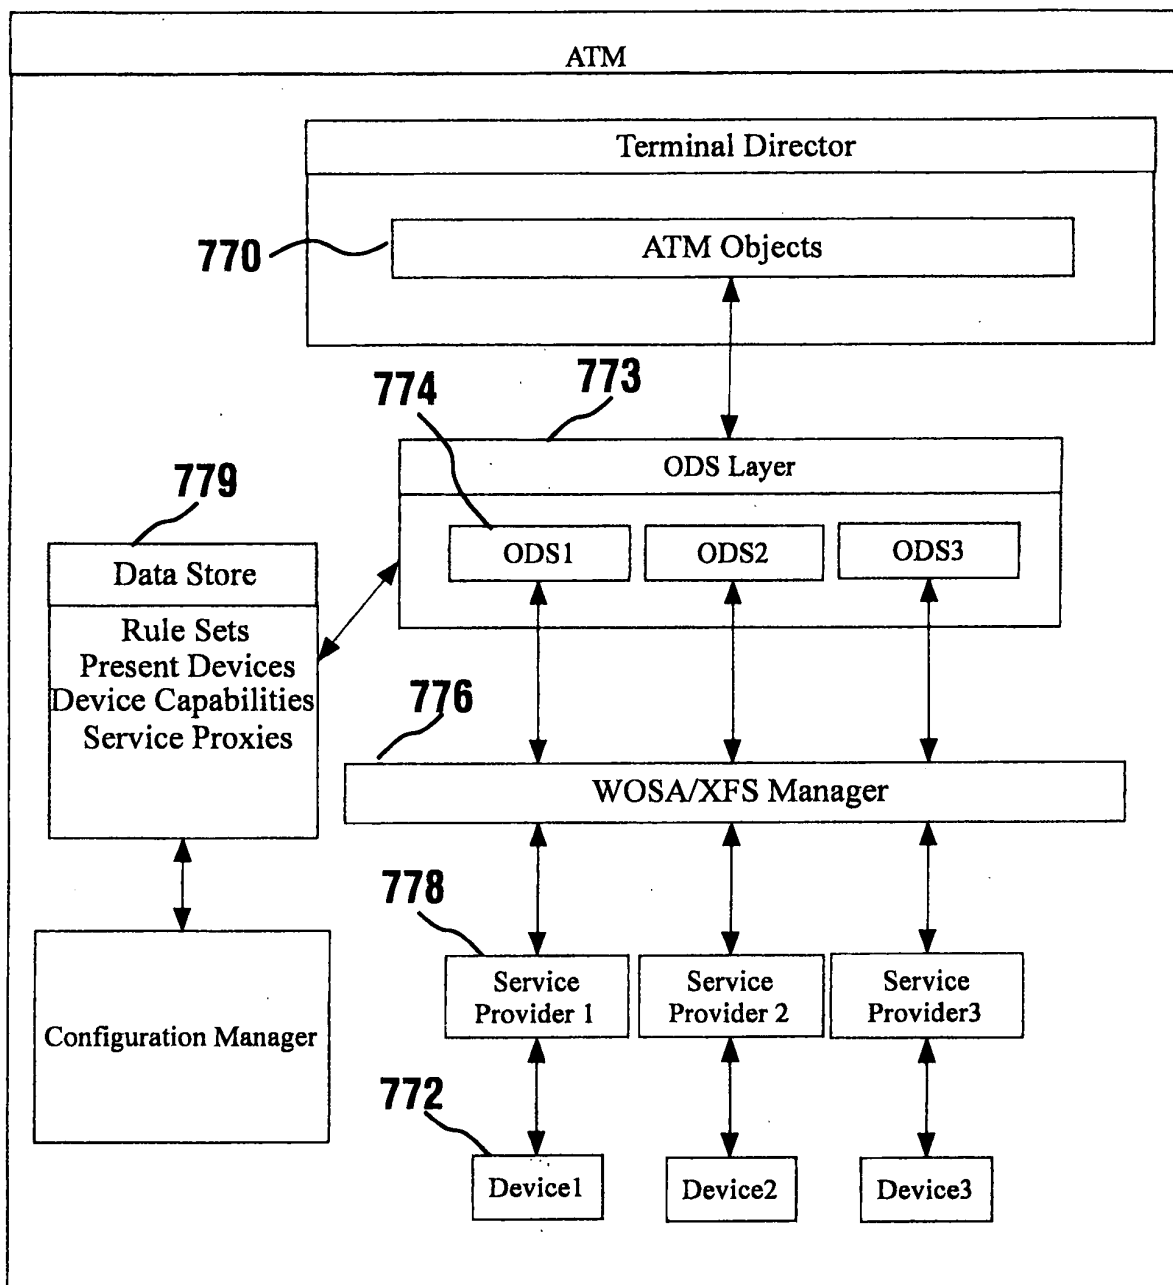**FIG. 58**

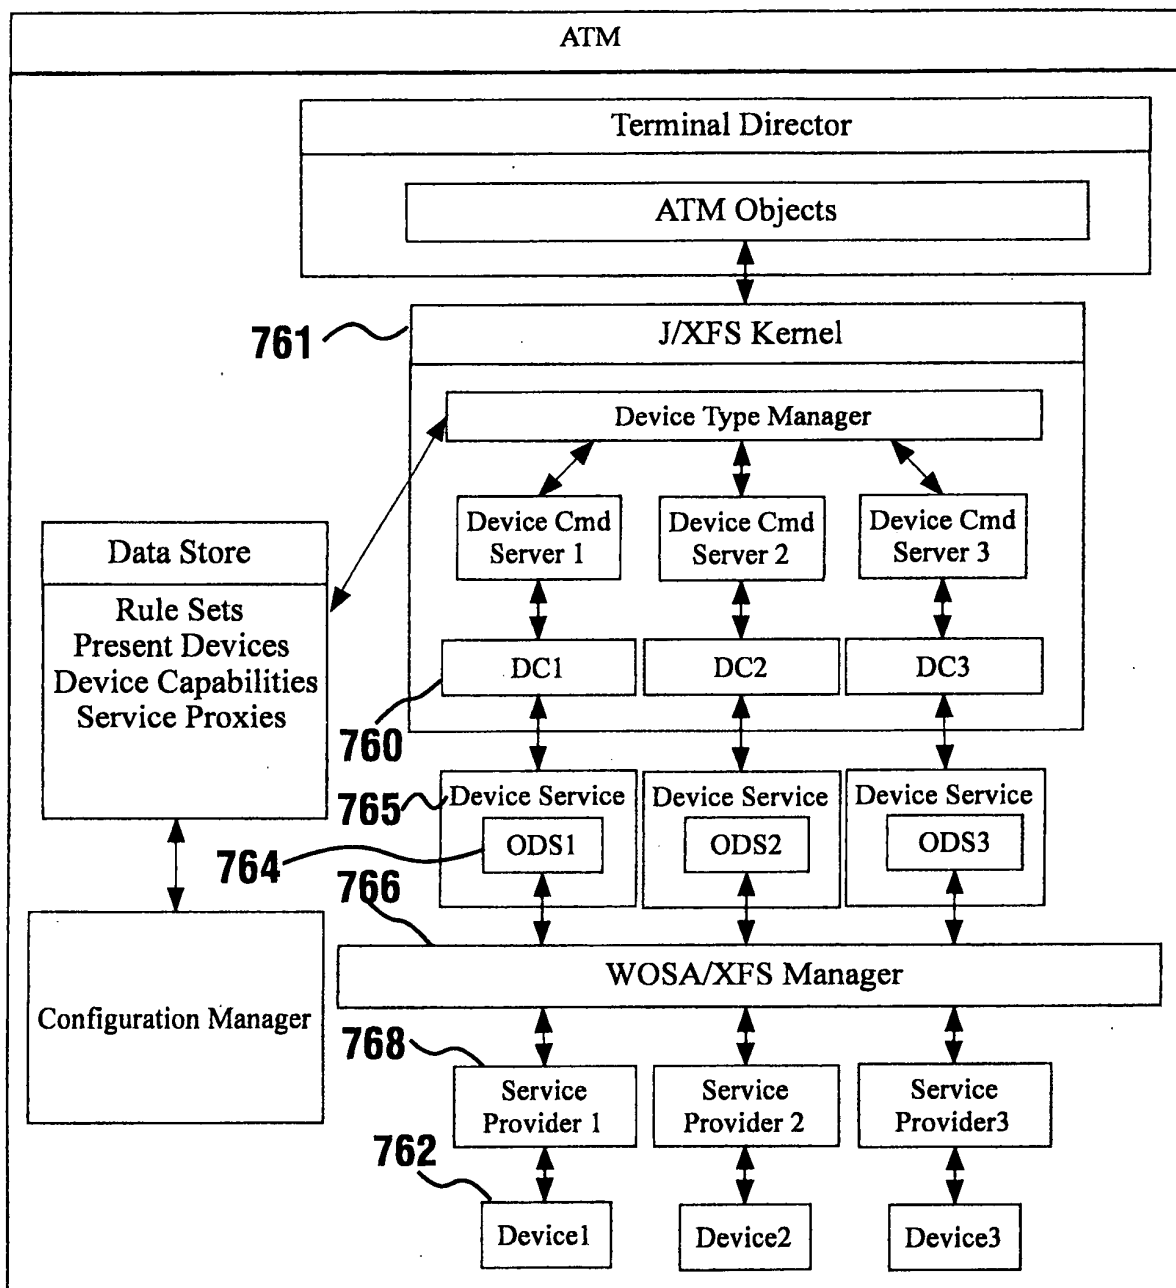**FIG. 59**